COMPONENTS

Easy-Access™ Aluminum Shaft Supports

Narrow Mount, Top Loading

LPG-M



Made in USA

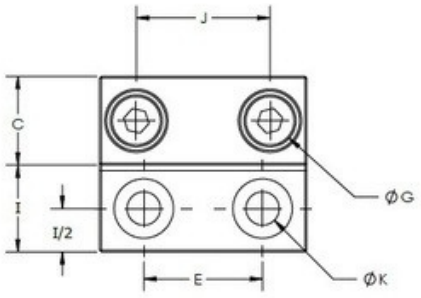

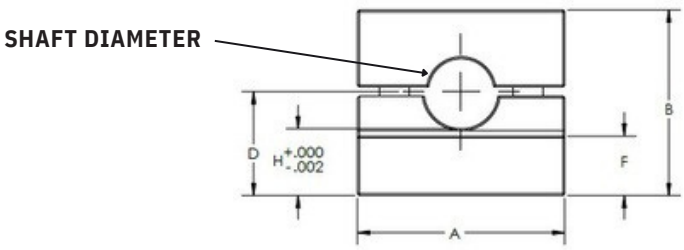

All dimensions are in millimeters.

Part Number	Shaft Dia.	A	B	C	D	E	F	G	H	I	J	K	Weight (lb)
LPG-10M	10mm	28	25	12	14	16	8	M4	9	12	18	4.5	0.06
LPG-12M	12mm	30	25	12	14	19	7	M4	8	12	20	4.5	0.10
LPG-20M	20mm	42	36	13	22	29	11	M5	12	17	30	5.6	0.14
LPG-25M	25mm	52	44	19	27	35	13	M6	15	17	38	6.6	0.28

Materials: Aluminum, Clear Anodized
Fasteners: Alloy Steel, Black Oxide
Lowest profile available
Easy to customize

Significant weight saving
ROHS compliant

The unique removable top design of this shaft support allows the user to easily remove the shafts, linear bearings and carriage without upsetting the position of the shaft support. This eliminates the need to reset the critical parallel alignment required in many linear shaft systems.

	Easy-Access™ Shaft Suppor ts	Common Shaft Suppor ts
Available shaft diameters from 10mm to 25mm	√	√
Maintains alignment while servicing shafts and bearings	√	X
Customs available (bore size, bore shape, material)	√	X
Light Weight	√	X
Parallel and perpendicular surfaces for easy alignment	√	X
Superior shaft holding strength	√	X
Lowest base to shaft height available	√	X