LPH-M

COMPONENTS


Easy-Access™ Aluminum Shaft Supports

Flange Mount, Top Loading

LPH-M



Made in USA

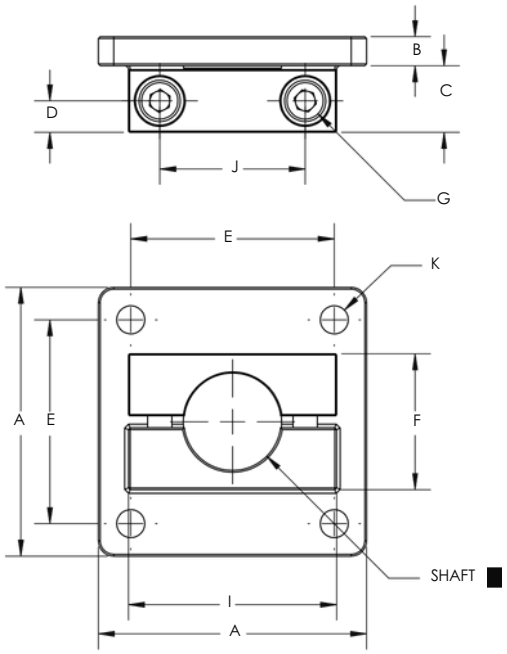

All dimensions are in millimeters

Part Number	Shaft Dia.	A	B	C	D	E	F	G	I	J	K	Weight (lb)
LPH-08M	8mm	36	5	11	5	28	18	M4X0.7	26	16	5	0.08
LPH-10M	10mm	43	6	13	6	32	22	M4X0.7	28	18	5	0.12
LPH-12M	12mm	43	6	13	6	32	22	M4X0.7	30	20	5	0.15
LPH-16M	16mm	55	6	14	7	42	26	M5X0.8	39	26	6	0.18
LPH-20M	20mm	55	8	14	7	42	28	M5X0.8	43	30	6	0.20
LPH-25M	25mm	68	8	20	10	54	34	M6X1.0	52	38	7	0.34
LPH-30M	30mm	87	8	20	10	64	40	M8X1.25	62	44	10	0.54
LPH-40M	40mm	100	10	20	10	75	52	M8X1.25	72	55	10	0.80

Materials: Aluminum, Clear Anodized
Fasteners: Alloy Steel, Black Oxide

Lowest profile available
Easy to customize
Significant weight saving
ROHS compliant

The unique removable top design of this shaft support allows the user to easily remove the shafts, linear bearings and carriage without upsetting the position of the shaft support. This eliminates the need to reset the critical parallel alignment required in many linear shaft systems.

	Easy-Access™ Shaft Suppor ts	Common Shaft Suppor ts
Available shaft diameters from 8mm to 40mm	√	√
Maintains alignment while servicing shafts and bearings	√	X
Customs available (bore size, bore shape, material)	√	X
Light Weight	√	X
Parallel and perpendicular surfaces for easy alignment	√	X
Superior shaft holding strength	√	X
Available in Low Profile and Standard footprint sizes	√	X
Lowest base to shaft height available	√	X

1-888-260-7466
516-771-6444
sales@ondrivesus.com
www.ondrivesus.com