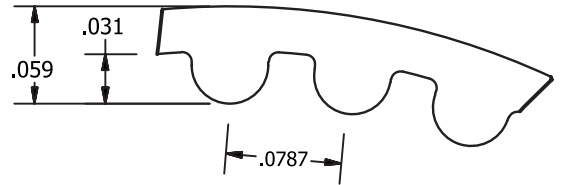


**2GT****GT®2 TIMING BELTS****2GT****2mm Pitch (.0787 inch)****MATERIAL:** Neoprene- Nylon Covered, Fiberglass reinforced**BELT WIDTH:** 3mm, 6mm & 9mm**TEMPERATURE:** -30°F TO +185°F**BREAKING STRENGTH:** 86 N (19.3 lbf) per 1 mm Belt Width**2mm GT PROFILE****Part Number****2GT** □ □ **NF -** □ □ □

Belt Width	Width Code
3mm	03
6mm	06
9mm	09

□ □ □  
Tooth Code

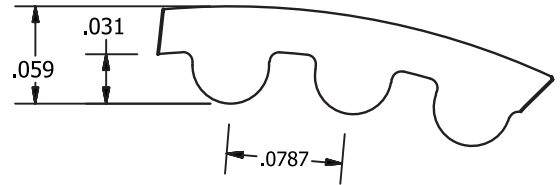
Tooth Code	Pitch Length	
	(mm)	(in)
027	54	2.13
029	58	2.28
030	60	2.36
033	66	2.60
036	72	2.83
037	74	2.91
038	76	2.99
039	78	3.07
041	82	3.23
042	84	3.31
043	86	3.39
044	88	3.46
045	90	3.54
046	92	3.62
047	94	3.70
048	96	3.78
049	98	3.86
050	100	3.94
051	102	4.02
053	106	4.17
054	108	4.25
055	110	4.33
056	112	4.41
057	114	4.49
058	116	4.57
059	118	4.65
060	120	4.72
061	122	4.80
062	124	4.88
063	126	4.96
064	128	5.04
065	130	5.12
066	132	5.20
067	134	5.28
068	136	5.35
069	138	5.43
070	140	5.51
071	142	5.59
072	144	5.67
073	146	5.75
074	148	5.83

Tooth Code	Pitch Length	
	(mm)	(in)
075	150	5.91
076	152	5.98
077	154	6.06
078	156	6.14
079	158	6.22
080	160	6.30
081	162	6.38
082	164	6.46
083	166	6.54
084	168	6.61
085	170	6.69
086	172	6.77
087	174	6.85
088	176	6.93
089	178	7.01
090	180	7.09
091	182	7.17
092	184	7.24
093	186	7.32
094	188	7.40
095	190	7.48
096	192	7.56
097	194	7.64
098	196	7.72
100	200	7.87
101	202	7.95
102	204	8.03
103	206	8.11
104	208	8.19
105	210	8.27
106	212	8.35
107	214	8.43
108	216	8.50
110	220	8.66
112	224	8.82
113	226	8.90
114	228	8.98
115	230	9.06
116	232	9.13
118	236	9.29
120	240	9.45

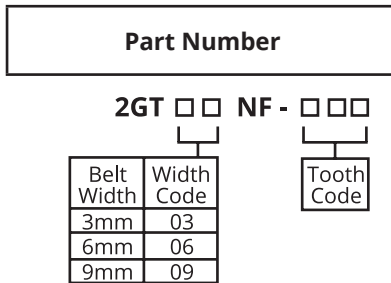
Tooth Code	Pitch Length	
	(mm)	(in)
121	242	9.53
122	244	9.61
124	248	9.76
125	250	9.84
126	252	9.92
127	254	10.00
128	256	10.08
129	258	10.16
130	260	10.24
132	264	10.39
133	266	10.47
134	268	10.55
135	270	10.63
137	274	10.79
139	278	10.94
140	280	11.02
141	282	11.10
142	284	11.18
143	286	11.26
144	288	11.34
145	290	11.42
146	292	11.50
147	294	11.57
150	300	11.81
151	302	11.89
152	304	11.97
154	308	12.13
155	310	12.20
157	314	12.36
159	318	12.52
160	320	12.60
161	322	12.68
162	324	12.76
163	326	12.83
164	328	12.91
165	330	12.99
166	332	13.07
168	336	13.23
169	338	13.31
170	340	13.39
171	342	13.46

Continued on next page

**ondrives**.US Corp.216 N. Main St., Freeport, NY 11520  
ISO9001:2008 Certifiedphone: 888-260-7466  
fax: 516-771-6444www.ondrivesUS.com  
sales@ondrivesUS.com**Page 7 - 1**

**2GT****GT®2 TIMING BELTS****2GT****2mm Pitch (.0787 inch)****MATERIAL:** Neoprene- Nylon Covered, Fiberglass reinforced**BELT WIDTH:** 3mm, 6mm & 9mm**TEMPERATURE:** -30°F TO +185°F**BREAKING STRENGTH:** 86 N (19.3 lbf) per 1 mm Belt Width**2mm GT PROFILE**

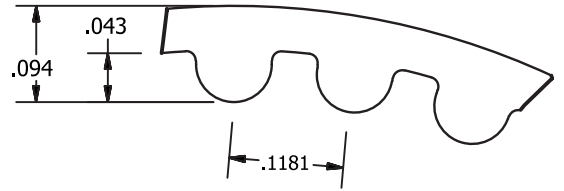
Continued from previous page



Tooth Code	Pitch Length	
	(mm)	(in)
172	344	13.54
173	346	13.62
175	350	13.78
176	352	13.86
177	354	13.94
178	356	14.02
179	358	14.09
180	360	14.17
182	364	14.33
183	366	14.41
185	370	14.57
186	372	14.65
188	376	14.80
190	380	14.96
191	382	15.04
193	386	15.20
196	392	15.43
197	394	15.51
200	400	15.75
203	406	15.98
206	412	16.22
210	420	16.54
213	426	16.77
214	428	16.85
215	430	16.93
218	436	17.17
220	440	17.32
222	444	17.48
223	446	17.56
224	448	17.64
226	452	17.80
228	456	17.95
230	460	18.11
233	466	18.35
235	470	18.50
237	474	18.66
239	478	18.82
240	480	18.90
242	484	19.06
243	486	19.13
244	488	19.21

Tooth Code	Pitch Length	
	(mm)	(in)
246	492	19.37
247	494	19.45
250	500	19.69
251	502	19.76
252	504	19.84
253	506	19.92
258	516	20.31
262	524	20.63
264	528	20.79
265	530	20.87
267	534	21.02
272	544	21.42
275	550	21.65
276	552	21.73
279	558	21.97
280	560	22.05
285	570	22.44
286	572	22.52
288	576	22.68
289	578	22.76
293	586	23.07
300	600	23.62
303	606	23.86
308	616	24.25
315	630	24.80
317	634	24.96
320	640	25.20
323	646	25.43
330	660	25.98
335	670	26.38
338	676	26.61
345	690	27.17
348	696	27.40
351	702	27.64
363	726	28.58
371	742	29.21
372	744	29.29
376	752	29.61
380	760	29.92
386	772	30.39
391	782	30.79

Tooth Code	Pitch Length	
	(mm)	(in)
400	800	31.50
405	810	31.89
408	816	32.13
424	848	33.39
426	852	33.54
430	860	33.86
433	866	34.09
446	892	35.12
450	900	35.43
465	930	36.61
475	950	37.40
488	976	38.43
497	994	39.13
502	1004	39.53
514	1028	40.47
516	1032	40.63
533	1066	41.97
534	1068	42.05
555	1110	43.70
570	1140	44.88
582	1164	45.83
590	1180	46.46
605	1210	47.64
614	1228	48.35
617	1234	48.58
628	1256	49.45
655	1310	51.57
660	1320	51.97
672	1344	52.91
680	1360	53.54
693	1386	54.57
762	1524	60
779	1558	61.34
830	1660	65.35
844	1688	66.46
850	1700	66.93
905	1810	71.26
915	1830	72.05
925	1850	72.83
930	1860	73.23
955	1910	75.20

**3GT****GT®2 TIMING BELTS****3GT****3mm Pitch (.1181 inch)****MATERIAL:** Neoprene- Nylon Covered, Fiberglass reinforced**BELT WIDTH:** 6mm, 9mm & 15mm**TEMPERATURE:** -30°F TO +185°F**BREAKING STRENGTH:** 158 N (35.5 lbf) per 1mm Belt Width**3mm GT PROFILE****Part Number****3GT** □ □ **NF -** □ □ □

Belt Width	Width Code
6mm	06
9mm	09
15mm	15

Tooth Code



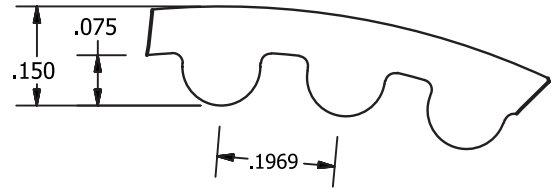
Tooth Code	Pitch Length	
	(mm)	(in)
033	99	3.90
035	105	4.13
037	111	4.37
040	120	4.72
041	123	4.84
043	129	5.08
045	135	5.31
048	144	5.67
050	150	5.91
053	159	6.26
054	162	6.38
055	165	6.50
058	174	6.85
059	177	6.97
060	180	7.09
061	183	7.20
062	186	7.32
063	189	7.44
064	192	7.56
065	195	7.68
066	198	7.80
067	201	7.91
068	204	8.03
070	210	8.27
072	216	8.50
073	219	8.62
075	225	8.86
077	231	9.09
078	234	9.21
080	240	9.45
081	243	9.57
082	246	9.69
084	252	9.92
085	255	10.04
089	267	10.51
090	270	10.63

Tooth Code	Pitch Length	
	(mm)	(in)
092	276	10.87
094	282	11.10
095	285	11.22
096	288	11.34
097	291	11.46
098	294	11.57
100	300	11.81
101	303	11.93
103	309	12.17
104	312	12.28
108	324	12.76
110	330	12.99
113	339	13.35
116	348	13.70
118	354	13.94
119	357	14.06
120	360	14.17
121	363	14.29
125	375	14.76
128	384	15.12
129	387	15.24
130	390	15.35
131	393	15.47
133	399	15.71
136	408	16.06
138	414	16.30
140	420	16.54
148	444	17.48
149	447	17.60
150	450	17.72
152	456	17.95
158	474	18.66
160	480	18.90
161	483	19.02
163	489	19.25
165	495	19.49

Tooth Code	Pitch Length	
	(mm)	(in)
167	501	19.72
168	504	19.84
170	510	20.08
171	513	20.20
174	522	20.55
179	537	21.14
180	540	21.26
184	552	21.73
187	561	22.09
188	564	22.20
190	570	22.44
194	582	22.91
196	588	23.15
200	600	23.62
207	621	24.45
210	630	24.80
219	657	25.87
228	684	26.93
232	696	27.40
245	735	28.94
250	750	29.53
262	786	30.94
280	840	33.07
283	849	33.43
299	897	35.31
308	924	36.38
315	945	37.20
350	1050	41.34
360	1080	42.52
424	1272	50.08
512	1536	60.47
529	1587	62.48
555	1665	65.55
564	1692	66.61
687	2061	81.14
820	2460	96.85

**5GT****GT®2 TIMING BELTS****5GT**

5mm Pitch (.1968 inch)

**MATERIAL:** Neoprene- Nylon Covered, Fiberglass reinforced**BELT WIDTH:** 9mm, 15mm & 25mm**TEMPERATURE:** -30°F TO +185°F**BREAKING STRENGTH:** 315 N (70.8 lbf) per 1mm Belt Width**5mm GT PROFILE****Part Number**

5GT □□ NF - □□□

Belt Width	Width Code
9mm	09
15mm	15
25mm	25

Tooth Code
□□□



Tooth Code	Pitch Length	
	(mm)	(in)
040	200	7.87
045	225	8.86
050	250	9.84
053	265	10.43
055	275	10.83
056	280	11.02
057	285	11.22
060	300	11.81
065	325	12.80
066	330	12.99
068	340	13.39
070	350	13.78
071	355	13.98
072	360	14.17
075	375	14.76
080	400	15.75
081	405	15.94
082	410	16.14
083	415	16.34
085	425	16.73
088	440	17.32
089	445	17.52
090	450	17.72
092	460	18.11
095	475	18.70
098	490	19.29
100	500	19.69
102	510	20.08
105	525	20.67
106	530	20.87
107	535	21.06
108	540	21.26

Tooth Code	Pitch Length	
	(mm)	(in)
110	550	21.65
113	565	22.24
115	575	22.64
116	580	22.83
120	600	23.62
125	625	24.61
127	635	25.00
130	650	25.59
133	665	26.18
140	700	27.56
150	750	29.53
155	775	30.51
160	800	31.50
163	815	32.09
170	850	33.46
172	860	33.86
180	900	35.43
190	950	37.40
200	1000	39.37
210	1050	41.34
230	1150	45.28
254	1270	50.00
260	1300	51.18
290	1450	57.09
300	1500	59.06
320	1600	62.99
344	1720	67.72
351	1755	69.09
370	1850	72.83
420	2100	82.68
488	2440	96.06