



ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

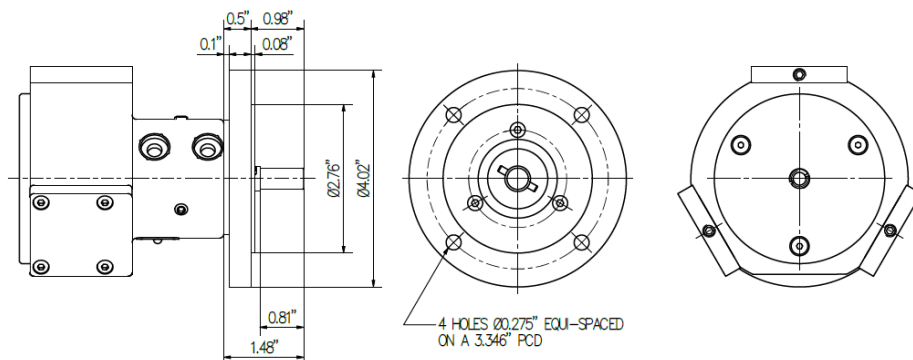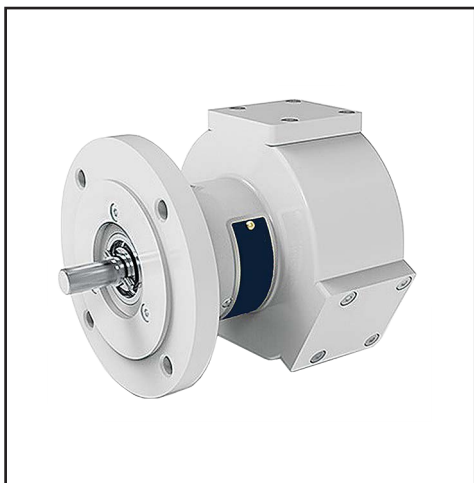

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-1C	Flange Mount	Aluminum	1/8" BSP	200 - 800 RPM	3.3 lbs

Torque at 200 rpm / 6.9 bar (100 psi)

24.7 in.lb

Torque at 800 rpm / 6.9 bar (100 psi)

14.7 in.lb

Max air consumption 800 rpm / 6.9 bar




5.70 ft³/min

Shaft Diameter

0.394"

Available on Request:
Air Motors with Gearboxes
NEMA Flange Mount

*Also available in Body Mount and Base Mount on REQUEST

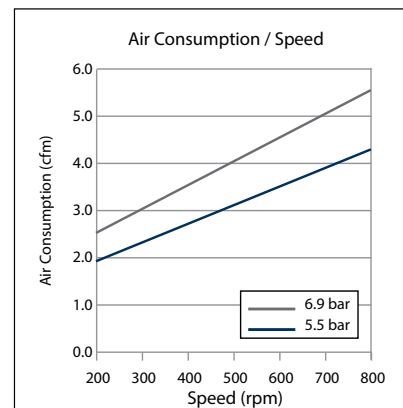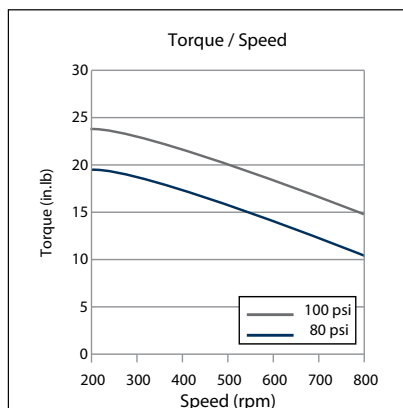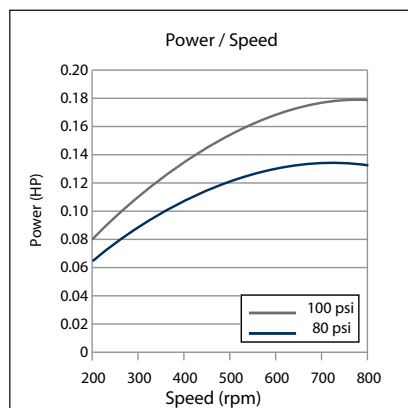

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us