


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

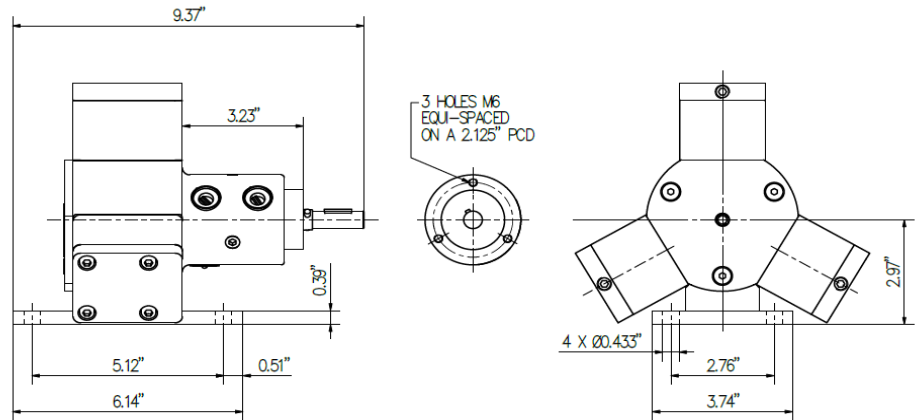

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-3B	Base Mount	Aluminum	1/4" BSP	150 - 700 RPM	8.3 lbs

Torque at 200 rpm / 6.9 bar (100 psi)

87 in.lb

Torque at 700 rpm / 6.9 bar (100 psi)

41 in.lb

Max air consumption 700 rpm / 6.9 bar




12.7 ft³/min

Shaft Diameter

0.5"

Available on Request:
Air Motors with Gearboxes
Lubricated Air Motors

*Also available in Flange Mount, Body Mount, NEMA flanges, and Acetal Housing on REQUEST

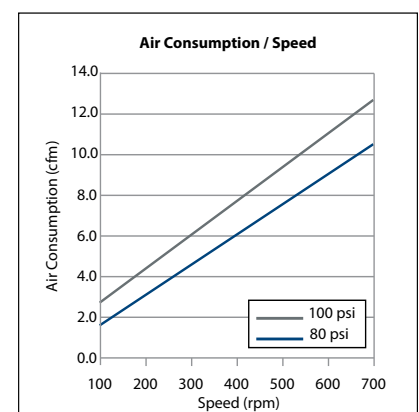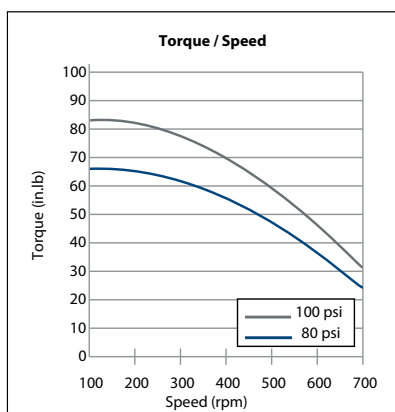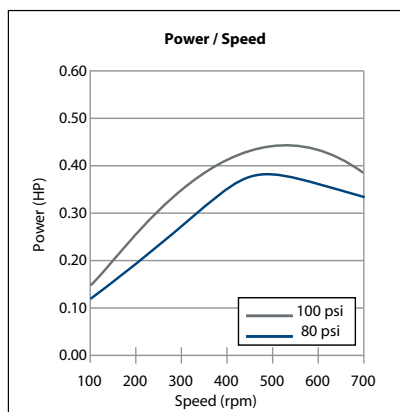

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us