


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

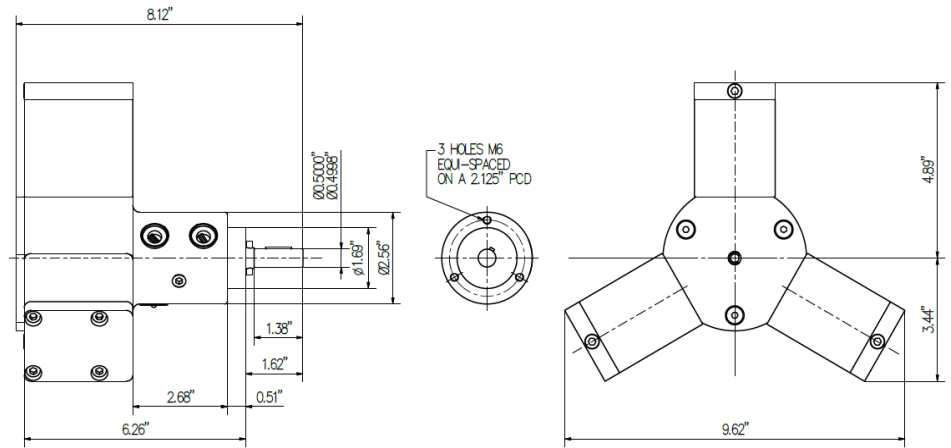

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-7A	Body Mount	Aluminum	1/4" BSP	100 - 400 RPM	10 lbs

Torque at 100 rpm / 6.9 bar (100 psi)

139 in.lb

Torque at 400 rpm / 6.9 bar (100 psi)

69 in.lb

Max air consumption 400 rpm / 6.9 bar

7.0 ft³/min

Shaft Diameter




0.5"

Available on Request:

Air Motors with Gearboxes

Lubricated Air Motors

*Also available in Flange Mount, Base Mount, NEMA flanges, and Acetal Housing on REQUEST

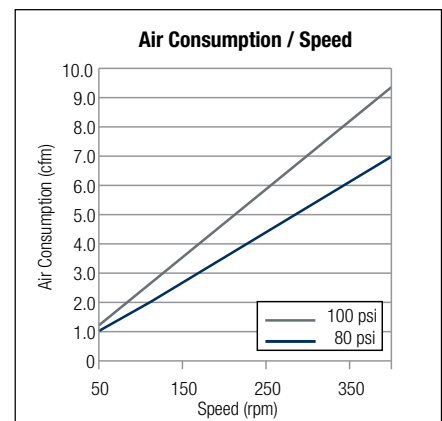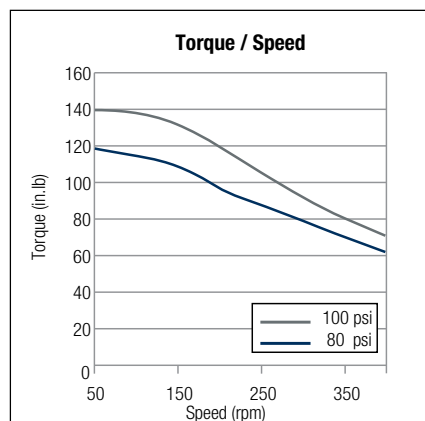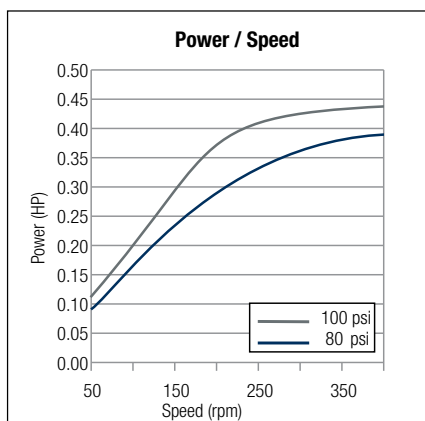

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us