


ATA

# AIR-TORQUE

## Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA



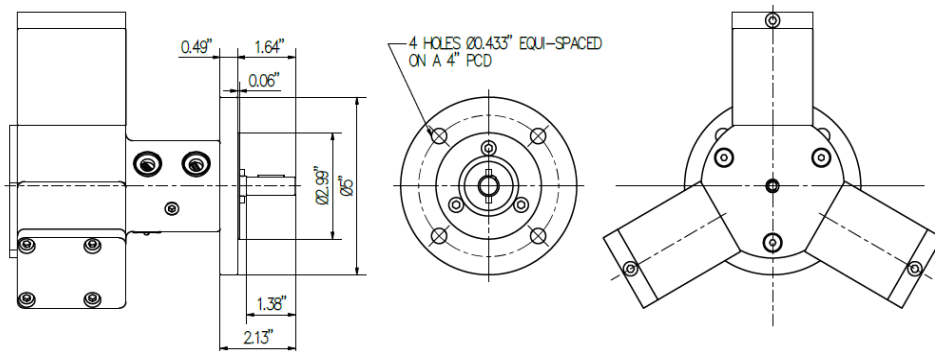


| Part Number | Type         | Housing  | Ports    | Speed Range   | Weight |
|-------------|--------------|----------|----------|---------------|--------|
| ATA-7C      | Flange Mount | Aluminum | 1/4" BSP | 100 - 400 RPM | 10 lbs |

|                                       |                          |
|---------------------------------------|--------------------------|
| Torque at 100 rpm / 6.9 bar (100 psi) | 139 in.lb                |
| Torque at 400 rpm / 6.9 bar (100 psi) | 69 in.lb                 |
| Max air consumption 400 rpm / 6.9 bar | 7.0 ft <sup>3</sup> /min |
| Shaft Diameter                        | 0.5"                     |

Available on Request:  
Air Motors with Gearboxes  
Lubricated Air Motors  
NEMA Flange Mount

\*Also available in Body Mount and Base Mount on REQUEST

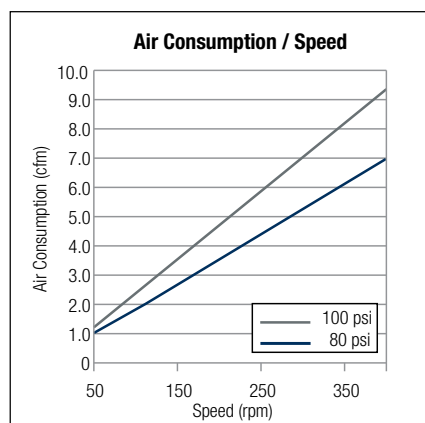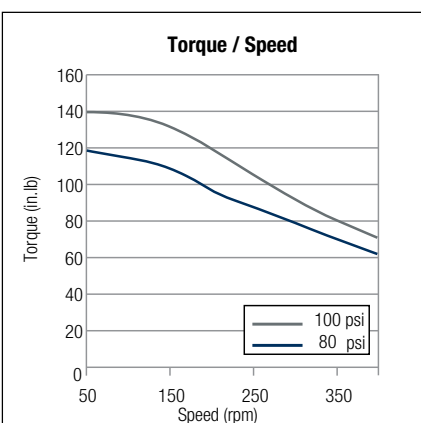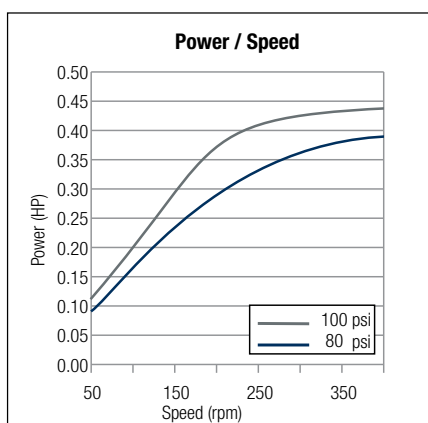

Testing in your application is necessary. All figures listed are to be used for guidance only.

**ondrives.us**

1-888-260-7466  
516-771-6444

sales@ondrivesus.com  
www.ondrives.us