



RSM

# COMPONENTS

RSM

## Stud Mount Support

For Bearings - Gears - Pulleys  
Inch

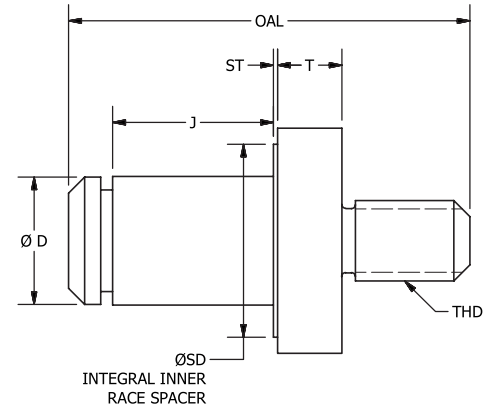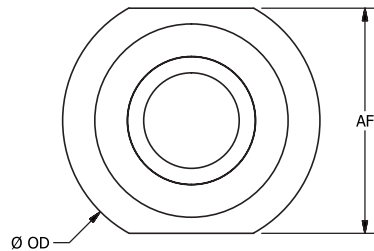

Part Number	D	J	OD	AF	T	THD	OAL	SD	ST
	Journal Dia.	Journal Length	Journal Dia.	Across Flats	Flange Thickness	Thread	Overall Length	Spacer Dia.	Spacer Thickness
<b>RSM-250</b>	0.250	0.375	0.500	7/16	0.25	1/4-20	1.06	0.375	0.016
<b>RSM-375</b>	0.375	0.438	0.750	5/8	0.25	1/4-20	1.23	0.562	0.016
<b>RSM-500</b>	0.500	0.625	1.000	7/8	0.25	5/16-18	1.56	0.750	0.016
<b>RSM-625</b>	0.625	0.625	1.125	1	0.25	5/16-18	1.59	0.875	0.016
<b>RSM-750</b>	0.750	0.625	1.250	1-1/8	0.25	3/8-16	1.79	1.000	0.016
<b>RSM-1000</b>	1.000	0.625	1.500	1-5/16	0.25	1/2-13	2.00	1.250	0.016

### Materials

Mount: 1215 Steel, Zinc Plated

Retaining Ring: Steel

Shim Spacers: Stainless Steel

Retaining ring (E-Clip) and 3 sizes of shim spacers supplied.