

BLH30
BLHT30

GEARBOXES

BLH30
BLHT30

Spiral Bevel & Spiral Bevel Tee Heavy Duty Gearbox


Hardened Spiral Bevels 1.32 – 4.4 Nm 1:1 - 2:1
Metric Shaft Diameters




BLH30




BLHT30

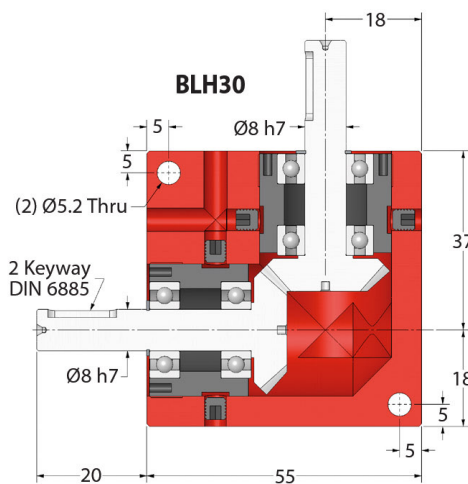

BLH30

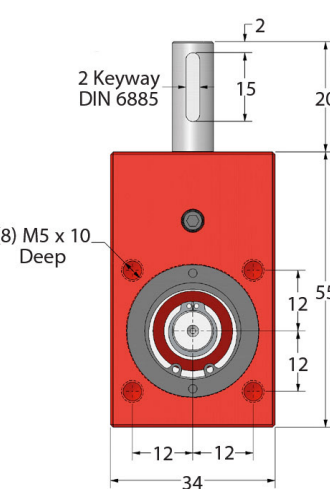

2 Keyway
DIN 6885

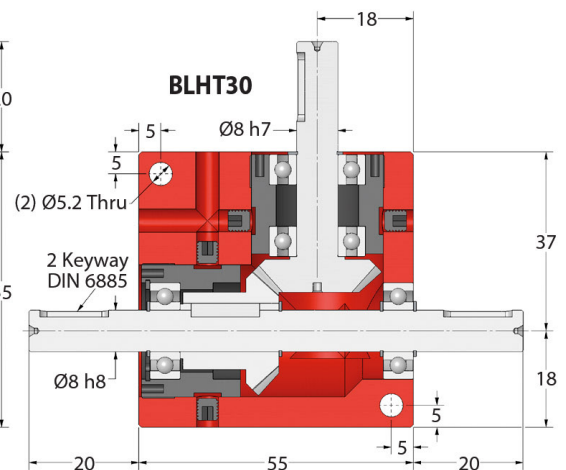

BLHT30

Part Number			Ratio	Efficiency at 1000 RPM	Reflected Inertia at Input (kg.m ²)
Standard ≈1°	Low Standard ≤30'	Red. Standard ≤10'			
BLH30-1	BLH30-1A	BLH30-1AR	1:1	88%	2.19 x 10 ⁻⁶
BLH30-2	BLH30-2A	BLH30-2AR	2:1	88%	5.00 x 10 ⁻⁷
BLHT30-1	BLHT30-1A	BLHT30-1AR	1:1	88%	2.19 x 10 ⁻⁶
BLHT30-2	BLHT30-2A	BLHT30-2AR	2:1	88%	5.00 x 10 ⁻⁷

Weight: BLH: 0.28 kg, BLHT: 0.30 kg.

Output Backlash: ≈1°.

Max. Input Speed: 3,000 Rpm.

Greased for Life: Shell Gadus S2 V220AD 2.

Input/Output Key: KK2-14.

Testing in your application is necessary.
You will need to assess duty cycles and confirm
gearbox suitability with your own calculations.
All figures listed are to be used for guidance only.

Output Torque Nm

RPM Input	Reduction Ratio	
	1:1	2:1
3000	1.65	1.32
2000	1.81	1.45
1750	1.91	1.53
1000	2.20	1.76
500	2.51	2.00
100	3.38	2.70
50	3.70	3.00
10	4.40	3.54

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrivesus.com