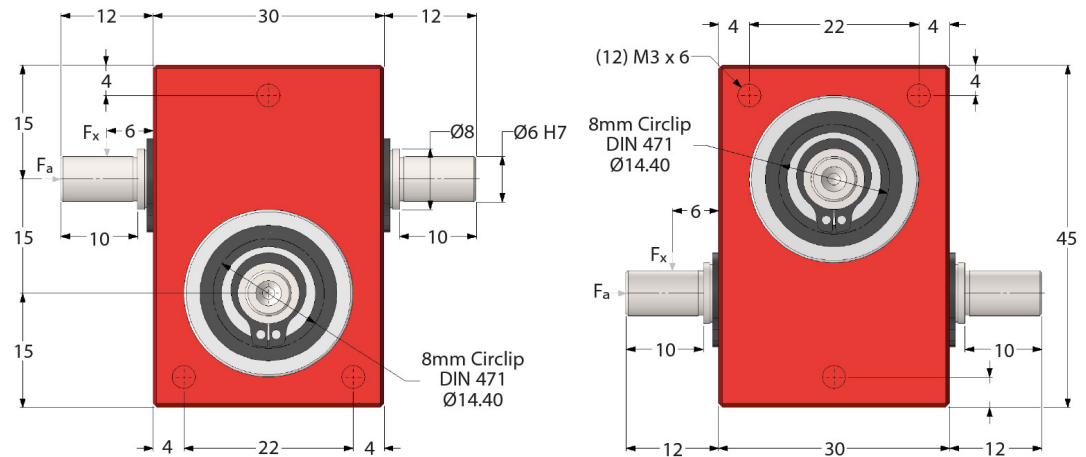
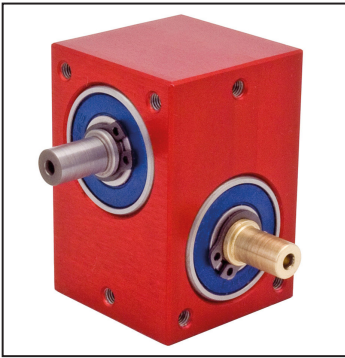


E15

GEARBOXES

E15

Right Angle Helical Reducers

Heavy Duty 6mm Dia. Shafts 0.4 – 2.53 Nm **1:1 - 40:1**

Part Number	Ratio	Type	Input Face	Efficiency at 1000 Rpm	Max Input Speed	Reflected Inertia at Input (kg.m ²) Self	Locking Output
E15-1	1:1	Helical	A	88%	4,000	3.762 x 10 ⁻⁶	✗
E15-2	2:1	Helical	A	86%	4,000	2.349 x 10 ⁻⁶	✗
E15-3	3:1	Helical	A	85%	4,000	2.011 x 10 ⁻⁶	✗
E15-4	4:1	Helical	A	84%	4,000	1.986 x 10 ⁻⁶	✗
E15-5	5:1	Helical	A	80%	4,000	1.544 x 10 ⁻⁶	✗
E15-8	8:1	Wormwheel	A	80%	2,000	1.622 x 10 ⁻⁶	✗
E15-10	10:1	Wormwheel	A	73%	2,000	1.609 x 10 ⁻⁶	✗
E15-20	20:1	Wormwheel	A	67%	2,000	1.593 x 10 ⁻⁶	✓
E15-40	40:1	Wormwheel	A	60%	2,000	1.589 x 10 ⁻⁶	✓
E15-SP	1:1 - 40:1	Special Ratios : Replace SP with required ratio					
E15-SPA	1:1 - 40:1	Low Backlash ≤30' : Replace SP with required ratio					
E15-SPLH	1:1 - 40:1	Left Hand Helicals : Replace SP with required ratio					

Weight: 0.255 kg. Greased for Life: Shell Gadus S2 V220AD 2.

Self Locking Output: Subject to ratio and only applies in static condition.

Amount of locking effect may vary due to manufacturing processes.

Max. Overhung Loads at 1000 Rpm: Overhung Load (F_x) = 15 kg.Max. Thrust Loads at 1000 Rpm: Thrust Load (F_a) = 10 kg.

Standard Backlash: ≈1°.

Special shaft sizes and other modifications are available.

Please contact Technical Sales department.

Testing in your application is necessary.

You will need to assess duty cycles and confirm

gearbox suitability with your own calculations.

All figures listed are to be used for guidance only.

Output Torque Nm

RPM Input	Reduction Ratio								
	1:1	2:1	3:1	4:1	5:1	8:1	10:1	20:1	40:1
3000	0.40	0.40	0.40	0.40	0.40	-	-	-	-
2000	0.46	0.46	0.46	0.46	0.46	0.69	0.79	0.90	1.00
1000	0.66	0.66	0.66	0.66	0.66	0.86	0.97	1.08	1.19
500	0.92	0.92	0.92	0.92	0.92	1.27	1.37	1.47	1.56
100	1.19	1.19	1.19	1.19	1.19	1.72	1.78	1.87	1.95
50	1.25	1.25	1.25	1.25	1.25	1.95	2.07	2.18	2.24
10	1.32	1.32	1.32	1.32	1.32	2.39	2.44	2.51	2.53