


RPA16

GEARBOXES

Rack & Pinion Actuator Box

25 mm Stroke, 41 kg Load, 3 Nm

RPA16

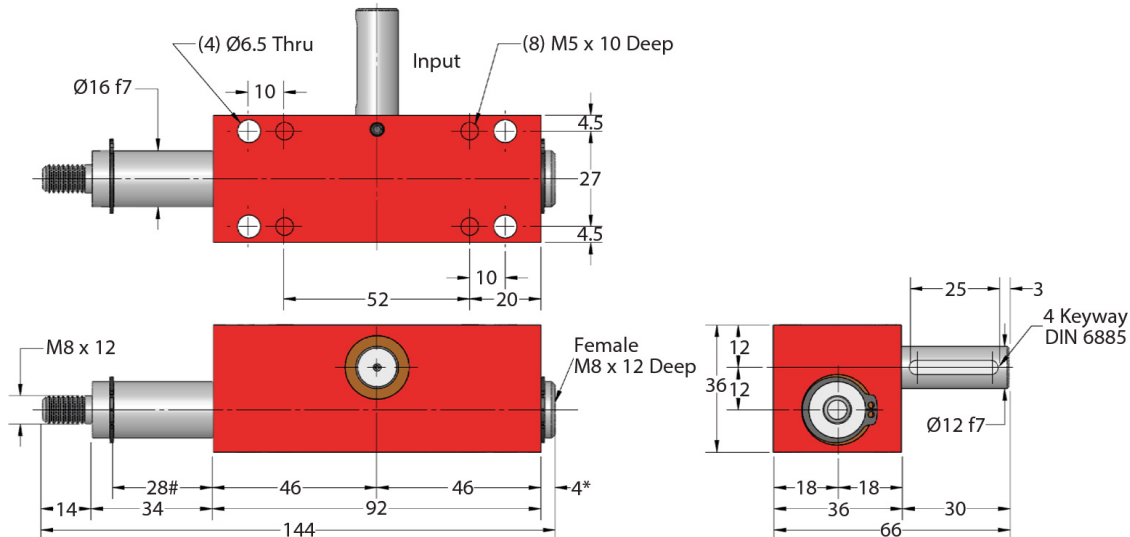

Maximum extension } These figures will increase/decrease during operation
 * Minimum extension }

Part Number	Output Shaft Dia.	Input Shaft Dia.	Standard Travel	Max Torque Input at 100 rpm Nm	Max Load Output kg	Angular Movement For 1mm Travel	Angular Movement For Std Travel
RPA16-25	$\varnothing 16$	$\varnothing 12$	25	3.0	41	8.19°	204.8°

Case: Aluminum. Rack & Pinion: High Carbon Steel 817M40 (EN24).

Backlash: 2°.

Travel: 25 mm travel = 204.8° pinion rotation on input. 1 mm travel = 8.19° pinion rotation on input.

Greased for Life: Shell Gadus S5 V42P 2.5.

Special lengths or travel can be supplied to suit customers' requirements.

ondrives.us

1-888-260-7466
 516-771-6444

sales@ondrivesus.com
 www.ondrivesus.com