



**J52
XJ52**

GEARBOXES

Inline Spur Gear Reducers

6mm Double or Single Shaft, 0.27 - 0.9 Nm **1:1 - 130:1**

**J52
XJ52**

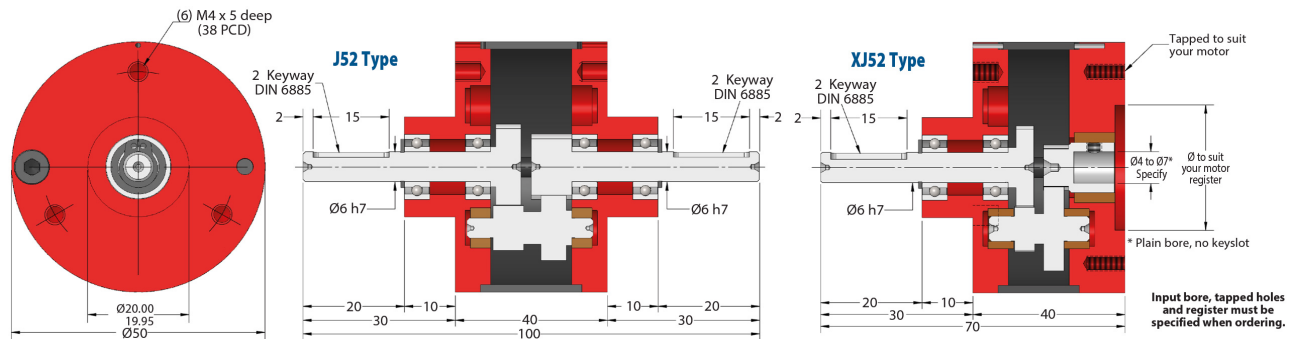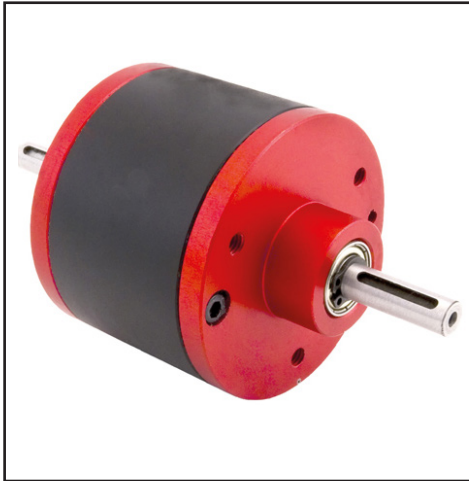

Part Number		Ratio	Efficiency at 1000 Rpm	Nm Output at 1000 Rpm	Standard Direction
J52-30	XJ52-30	30:1	88%	0.34	Opposite
J52-40	XJ52-40	40:1	88%	0.36	Opposite
J52-50	XJ52-50	50:1	88%	0.38	Opposite
J52-60	XJ52-60	60:1	88%	0.40	Opposite
J52-75	XJ52-75	75:1	88%	0.41	Opposite
J52-100	XJ52-100	100:1	88%	0.42	Opposite
J52-125	XJ52-125	125:1	88%	0.43	Opposite
J52-SP	XJ52-SP	1:1 - 130:1	Special Ratios : Replace SP with required ratio		

J52 Weight: 0.16 kg.

Backlash: Depends on ratio.

Max. Input Speed: 4,000 Rpm.

Greased for Life: Shell Gadus S5 V42P 2.5.

Max. Overhung and Thrust Loads at 1000 Rpm:

Output Overhung Load (Fxa) = 5 kg. Output Thrust Load (Fa) = 5 kg.

Shaft Keys: KK2-14.

Testing in your application is necessary.

You will need to assess duty cycles and confirm gearbox suitability with your own calculations.

All figures listed are to be used for guidance only.

Output Torque Nm

RPM Input	Reduction Ratio						
	30:1	40:1	50:1	60:1	75:1	100:1	125:1
4000	0.27	0.28	0.29	0.30	0.31	0.33	0.34
2000	0.30	0.32	0.33	0.34	0.35	0.38	0.40
1000	0.34	0.36	0.38	0.40	0.41	0.42	0.43
500	0.40	0.41	0.42	0.43	0.46	0.49	0.49
200	0.46	0.48	0.49	0.52	0.54	0.57	0.59
100	0.52	0.55	0.57	0.59	0.61	0.65	0.69
50	0.57	0.62	0.65	0.69	0.73	0.74	0.75
10	0.69	0.73	0.75	0.75	0.75	0.90	0.90

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrivesus.com