
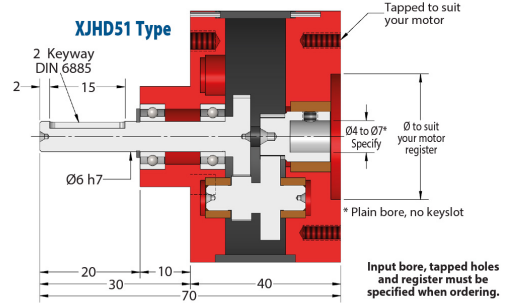
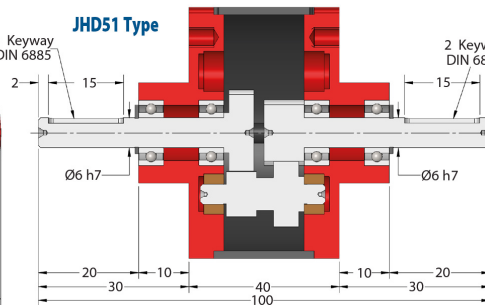


**JHD51
XJHD51**

GEARBOXES

Hi-Torque Inline Spur Gear Reducers 6mm Double or Single Shaft, 1 - 3 Nm **1:1 - 20:1**

**JHD51
XJHD51**



Part Number		Ratio	Efficiency at 1000 Rpm	Nm Output at 1000 Rpm	Standard Direction
JHD51-2	XJHD51-2	2:1	92%	1.60	Same
JHD51-3	XJHD51-3	3:1	92%	1.50	Same
JHD51-4	XJHD51-4	4:1	92%	1.40	Same
JHD51-5	XJHD51-5	5:1	92%	1.60	Same
JHD51-10	XJHD51-10	10:1	92%	1.75	Same
JHD51-15	XJHD51-15	15:1	92%	1.80	Same
JHD51-20	XJHD51-20	20:1	92%	1.90	Same
JHD51-SP	XJHD51-SP	1:1 - 20:1	Special Ratios : Replace SP with required ratio		

JHD51 Weight: 0.15 kg.
Output Backlash: $\approx 3^{\circ}$ - 6° .
Approx Motion: JHD51-10 = $2^{\circ}30'$ on output.
Max. Input Speed: 4,000 Rpm.
Greased for Life: Shell Gadus S5 V42P 2.5.
Max. Overhung and Thrust Loads at 1000 Rpm:
Output Overhung Load (F_x) = 5 kg. Output Thrust Load (F_a) = 5 kg.
Shaft Keys: KK2-14.

Testing in your application is necessary.
You will need to assess duty cycles and confirm gearbox suitability with your own calculations.
All figures listed are to be used for guidance only.

Output Torque Nm

RPM Input	Reduction Ratio						
	2:1	3:1	4:1	5:1	10:1	15:1	20:1
4000	1.18	1.10	1.00	1.15	1.30	1.40	1.50
2000	1.38	1.30	1.22	1.35	1.50	1.60	1.70
1000	1.60	1.50	1.40	1.60	1.75	1.80	1.90
500	1.80	1.65	1.55	1.70	1.80	2.00	2.10
200	2.00	1.90	1.75	1.85	2.00	2.15	2.30
100	2.38	2.20	2.00	2.10	2.25	2.40	2.50
50	2.60	2.40	2.20	2.35	2.50	2.65	2.75
10	2.85	2.70	2.50	2.60	2.70	2.85	3.00

ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrivesus.com