



PR5

GEARBOXES

PR5

Miniature Precision Worm Gear Reducers

Shaft Input & Output 0.009 – 0.028 Nm **6:1 - 18:1**

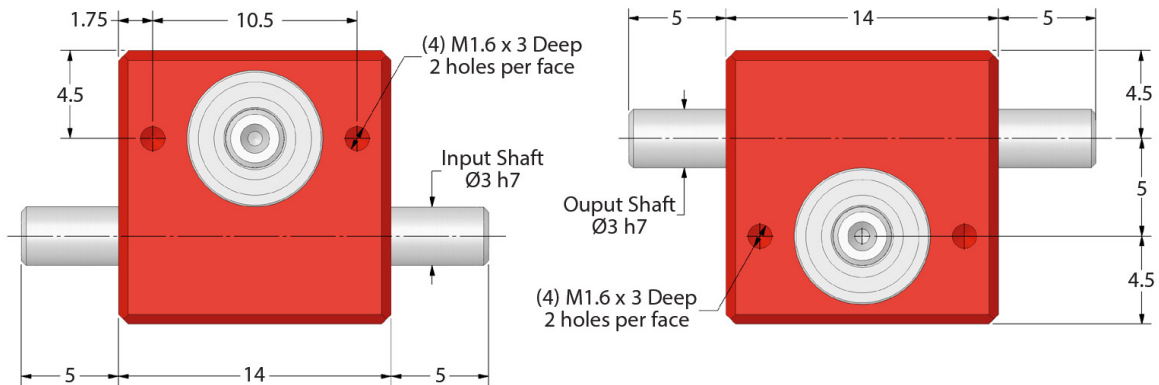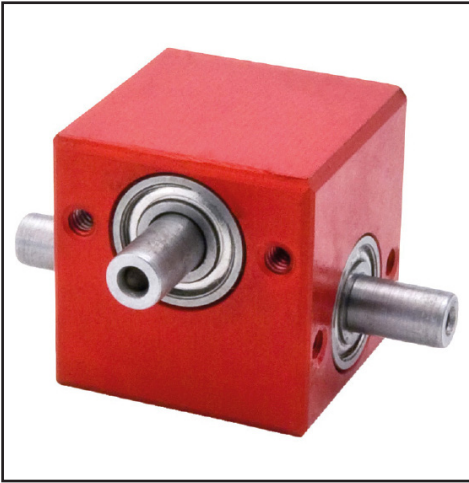

Part Number	Ratio	Efficiency at 1000 Rpm	Reflected Inertia at Input (kg.m ²)	Self* Locking Output
PR5-6	6:1	78%	6.04×10^{-9}	✗
PR5-9	9:1	71%	5.99×10^{-9}	✗
PR5-18	18:1	60%	5.96×10^{-9}	✓

Housing: AA15 Red Anodised Aluminum (6082-T6).

Shafts: 817M40(EN24) T Condition.

Worm: 817M40(EN24) T Condition.

Wheel: 817M40(EN24) T Condition.

Bearings: Steel ZZ Shielded.

Weight: 0.032 kg.

Backlash: $\approx 2^\circ$.

Max. Input Speed: 4,000 Rpm (short term).

Greased for Life: Shell Gadus S5 V42P 2.5.

* Static only and may not be under vibration or other conditions of use. Amount of locking effect may vary due to manufacturing processes etc.

Input Shaft: RH as standard.

Output Torque Nm

RPM Input	Reduction Ratio		
	6:1	9:1	18:1
2000	0.009	0.009	0.009
1000	0.012	0.012	0.012
500	0.017	0.017	0.017
200	0.022	0.022	0.022
100	0.028	0.028	0.028

Testing in your application is necessary.
You will need to assess duty cycles and confirm gearbox suitability with your own calculations.
All figures listed are to be used for guidance only.

ondrives.us

☎ 1-888-260-7466

☎ 516-771-6444

💻 sales@ondrivesus.com

🌐 www.ondrivesus.com