



64 Pitch Precision Spur Gears - Set Screw Hub

Aluminum - Anodized, AGMA Quality 10, 20° Pressure Angle

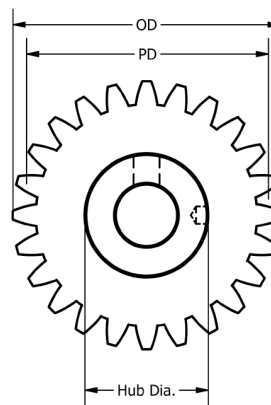

Part Number					No. of Teeth	Pitch Dia. PD	Outside Dia. OD
0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.1873 Bore 0.188 Face 0.375 HD 0.406 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	0.2498 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw			
SG64P10A-18 ▲	---	---	---	---	18	0.2813	0.313
SG64P10A-19 ▲	---	---	---	---	19	0.2969	0.328
SG64P10A-20 ▲	SG64P19A-20 ▲	SG64P21A-20 ▲	---	---	20	0.3125	0.344
SG64P10A-22	SG64P19A-22 ▲	SG64P21A-22 ▲	---	---	22	0.3438	0.375
SG64P10A-24	SG64P19A-24 ▲	SG64P21A-24 ▲	---	---	24	0.3750	0.406
SG64P10A-25	SG64P19A-25 ▲	SG64P21A-25 ▲	---	---	25	0.3906	0.422
SG64P10A-26	SG64P19A-26	SG64P21A-26	SG64P26A-26 ▲	SG64P28A-26 ▲	26	0.4063	0.438
SG64P10A-28	SG64P19A-28	SG64P21A-28	SG64P26A-28 ▲	SG64P28A-28 ▲	28	0.4375	0.469
SG64P10A-30	SG64P19A-30	SG64P21A-30	SG64P26A-30 ▲	SG64P28A-30 ▲	30	0.4688	0.500
SG64P10A-32	SG64P19A-32	SG64P21A-32	SG64P26A-32 ▲	SG64P28A-32 ▲	32	0.5000	0.531
SG64P10A-34	SG64P19A-34	SG64P21A-34	SG64P26A-34	SG64P28A-34	34	0.5313	0.563
SG64P10A-35	SG64P19A-35	SG64P21A-35	SG64P26A-35	SG64P28A-35	35	0.5469	0.578
SG64P10A-36	SG64P19A-36	SG64P21A-36	SG64P26A-36	SG64P28A-36	36	0.5625	0.594
SG64P10A-38	SG64P19A-38	SG64P21A-38	SG64P26A-38	SG64P28A-38	38	0.5938	0.625
SG64P10A-40	SG64P19A-40	SG64P21A-40	SG64P26A-40	SG64P28A-40	40	0.6250	0.656
SG64P10A-42	SG64P19A-42	SG64P21A-42	SG64P26A-42	SG64P28A-42	42	0.6563	0.688
SG64P10A-44	SG64P19A-44	SG64P21A-44	SG64P26A-44	SG64P28A-44	44	0.6875	0.719
SG64P10A-45	SG64P19A-45	SG64P21A-45	SG64P26A-45	SG64P28A-45	45	0.7031	0.734
SG64P10A-46	SG64P19A-46	SG64P21A-46	SG64P26A-46	SG64P28A-46	46	0.7188	0.750
SG64P10A-48	SG64P19A-48	SG64P21A-48	SG64P26A-48	SG64P28A-48	48	0.7500	0.781
SG64P10A-50	SG64P19A-50	SG64P21A-50	SG64P26A-50	SG64P28A-50	50	0.7813	0.813
SG64P10A-52	SG64P19A-52	SG64P21A-52	SG64P26A-52	SG64P28A-52	52	0.8125	0.844
SG64P10A-54	SG64P19A-54	SG64P21A-54	SG64P26A-54	SG64P28A-54	54	0.8438	0.875
SG64P10A-55	SG64P19A-55	SG64P21A-55	SG64P26A-55	SG64P28A-55	55	0.8594	0.891
SG64P10A-56	SG64P19A-56	SG64P21A-56	SG64P26A-56	SG64P28A-56	56	0.8750	0.906
SG64P10A-58	SG64P19A-58	SG64P21A-58	SG64P26A-58	SG64P28A-58	58	0.9063	0.938

▲ Teeth cut into hub. Hub diameter may equal O.D.

Continued on next page

Materials:

Aluminum - anodized

On Request:



14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.

Please call us with your needs.

64 Pitch Precision Spur Gears - Set Screw Hub

Aluminum - Anodized, AGMA Quality 10, 20° Pressure Angle

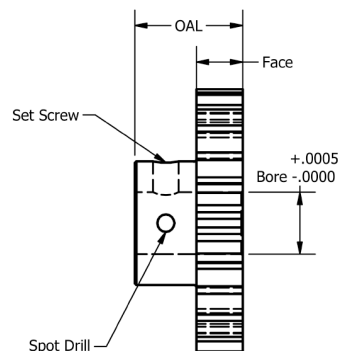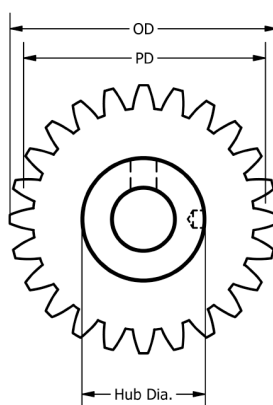

Part Number					No. of Teeth	Pitch Dia. PD	Outside Dia. OD
0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.1873 Bore 0.188 Face 0.375 HD 0.406 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	0.2498 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw			
SG64P10A-60	SG64P19A-60	SG64P21A-60	SG64P26A-60	SG64P28A-60	60	0.9375	0.969
SG64P10A-62	SG64P19A-62	SG64P21A-62	SG64P26A-62	SG64P28A-62	62	0.9688	1.000
SG64P10A-64	SG64P19A-64	SG64P21A-64	SG64P26A-64	SG64P28A-64	64	1.0000	1.031
SG64P10A-65	SG64P19A-65	SG64P21A-65	SG64P26A-65	SG64P28A-65	65	1.0156	1.047
SG64P10A-66	SG64P19A-66	SG64P21A-66	SG64P26A-66	SG64P28A-66	66	1.0313	1.063
SG64P10A-68	SG64P19A-68	SG64P21A-68	SG64P26A-68	SG64P28A-68	68	1.0625	1.094
SG64P10A-70	SG64P19A-70	SG64P21A-70	SG64P26A-70	SG64P28A-70	70	1.0938	1.125
SG64P10A-72	SG64P19A-72	SG64P21A-72	SG64P26A-72	SG64P28A-72	72	1.1250	1.156
SG64P10A-75	SG64P19A-75	SG64P21A-75	SG64P26A-75	SG64P28A-75	75	1.1719	1.203
SG64P10A-80	SG64P19A-80	SG64P21A-80	SG64P26A-80	SG64P28A-80	80	1.2500	1.281
SG64P10A-85	SG64P19A-85	SG64P21A-85	SG64P26A-85	SG64P28A-85	85	1.3281	1.359
SG64P10A-88	SG64P19A-88	SG64P21A-88	SG64P26A-88	SG64P28A-88	88	1.3750	1.406
SG64P10A-90	SG64P19A-90	SG64P21A-90	SG64P26A-90	SG64P28A-90	90	1.4063	1.438
SG64P10A-95	SG64P19A-95	SG64P21A-95	SG64P26A-95	SG64P28A-95	95	1.4844	1.516
SG64P10A-96	SG64P19A-96	SG64P21A-96	SG64P26A-96	SG64P28A-96	96	1.5000	1.531
SG64P10A-100	SG64P19A-100	SG64P21A-100	SG64P26A-100	SG64P28A-100	100	1.5625	1.594
SG64P10A-104	SG64P19A-104	SG64P21A-104	SG64P26A-104	SG64P28A-104	104	1.6250	1.656
SG64P10A-105	SG64P19A-105	SG64P21A-105	SG64P26A-105	SG64P28A-105	105	1.6406	1.672
SG64P10A-112	SG64P19A-112	SG64P21A-112	SG64P26A-112	SG64P28A-112	112	1.7500	1.781
SG64P10A-120	SG64P19A-120	SG64P21A-120	SG64P26A-120	SG64P28A-120	120	1.8750	1.906
SG64P10A-128	SG64P19A-128	SG64P21A-128	SG64P26A-128	SG64P28A-128	128	2.0000	2.031
SG64P10A-136	SG64P19A-136	SG64P21A-136	SG64P26A-136	SG64P28A-136	136	2.1250	2.156
---	SG64P19A-144	SG64P21A-144	SG64P26A-144	SG64P28A-144	144	2.2500	2.281
---	SG64P19A-160	SG64P21A-160	SG64P26A-160	SG64P28A-160	160	2.5000	2.531
---	SG64P19A-176	SG64P21A-176	SG64P26A-176	SG64P28A-176	176	2.7500	2.781
---	SG64P19A-192	SG64P21A-192	SG64P26A-192	SG64P28A-192	192	3.0000	3.031

▲ Teeth cut into hub. Hub diameter may equal O.D.

Materials:

Aluminum - anodized



On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.

64 Pitch Precision Spur Gears - Set Screw Hub

303 Stainless Steel, AGMA Quality 10, 20° Pressure Angle

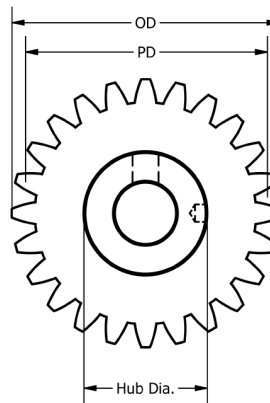

Part Number					No. of Teeth	Pitch Dia. PD	Outside Dia. OD
0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.1873 Bore 0.188 Face 0.375 HD 0.406 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	0.2498 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw			
SG64P10S-18 ▲	---	---	---	---	18	0.2813	0.313
SG64P10S-19 ▲	---	---	---	---	19	0.2969	0.328
SG64P10S-20 ▲	SG64P19S-20 ▲	SG64P21S-20 ▲	---	---	20	0.3125	0.344
SG64P10S-22	SG64P19S-22 ▲	SG64P21S-22 ▲	---	---	22	0.3438	0.375
SG64P10S-24	SG64P19S-24 ▲	SG64P21S-24 ▲	---	---	24	0.3750	0.406
SG64P10S-25	SG64P19S-25 ▲	SG64P21S-25 ▲	---	---	25	0.3906	0.422
SG64P10S-26	SG64P19S-26	SG64P21S-26	SG64P26S-26 ▲	SG64P28S-26 ▲	26	0.4063	0.438
SG64P10S-28	SG64P19S-28	SG64P21S-28	SG64P26S-28 ▲	SG64P28S-28 ▲	28	0.4375	0.469
SG64P10S-30	SG64P19S-30	SG64P21S-30	SG64P26S-30 ▲	SG64P28S-30 ▲	30	0.4688	0.500
SG64P10S-32	SG64P19S-32	SG64P21S-32	SG64P26S-32 ▲	SG64P28S-32 ▲	32	0.5000	0.531
SG64P10S-34	SG64P19S-34	SG64P21S-34	SG64P26S-34	SG64P28S-34	34	0.5313	0.563
SG64P10S-35	SG64P19S-35	SG64P21S-35	SG64P26S-35	SG64P28S-35	35	0.5469	0.578
SG64P10S-36	SG64P19S-36	SG64P21S-36	SG64P26S-36	SG64P28S-36	36	0.5625	0.594
SG64P10S-38	SG64P19S-38	SG64P21S-38	SG64P26S-38	SG64P28S-38	38	0.5938	0.625
SG64P10S-40	SG64P19S-40	SG64P21S-40	SG64P26S-40	SG64P28S-40	40	0.6250	0.656
SG64P10S-42	SG64P19S-42	SG64P21S-42	SG64P26S-42	SG64P28S-42	42	0.6563	0.688
SG64P10S-44	SG64P19S-44	SG64P21S-44	SG64P26S-44	SG64P28S-44	44	0.6875	0.719
SG64P10S-45	SG64P19S-45	SG64P21S-45	SG64P26S-45	SG64P28S-45	45	0.7031	0.734
SG64P10S-46	SG64P19S-46	SG64P21S-46	SG64P26S-46	SG64P28S-46	46	0.7188	0.750
SG64P10S-48	SG64P19S-48	SG64P21S-48	SG64P26S-48	SG64P28S-48	48	0.7500	0.781
SG64P10S-50	SG64P19S-50	SG64P21S-50	SG64P26S-50	SG64P28S-50	50	0.7813	0.813
SG64P10S-52	SG64P19S-52	SG64P21S-52	SG64P26S-52	SG64P28S-52	52	0.8125	0.844
SG64P10S-54	SG64P19S-54	SG64P21S-54	SG64P26S-54	SG64P28S-54	54	0.8438	0.875
SG64P10S-55	SG64P19S-55	SG64P21S-55	SG64P26S-55	SG64P28S-55	55	0.8594	0.891
SG64P10S-56	SG64P19S-56	SG64P21S-56	SG64P26S-56	SG64P28S-56	56	0.8750	0.906
SG64P10S-58	SG64P19S-58	SG64P21S-58	SG64P26S-58	SG64P28S-58	58	0.9063	0.938

▲ Teeth cut into hub. Hub diameter may equal O.D.

Continued on next page

Materials:

303 Stainless Steel

On Request:



14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.

Please call us with your needs.

64 Pitch Precision Spur Gears - Set Screw Hub

303 Stainless Steel, AGMA Quality 10, 20° Pressure Angle

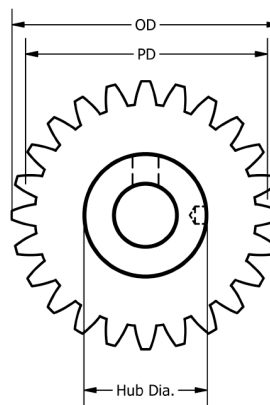

Part Number					No. of Teeth	Pitch Dia. PD	Outside Dia. OD
0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.1873 Bore 0.188 Face 0.375 HD 0.406 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	0.2498 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw			
SG64P10S-60	SG64P19S-60	SG64P21S-60	SG64P26S-60	SG64P28S-60	60	0.9375	0.969
SG64P10S-62	SG64P19S-62	SG64P21S-62	SG64P26S-62	SG64P28S-62	62	0.9688	1.000
SG64P10S-64	SG64P19S-64	SG64P21S-64	SG64P26S-64	SG64P28S-64	64	1.0000	1.031
SG64P10S-65	SG64P19S-65	SG64P21S-65	SG64P26S-65	SG64P28S-65	65	1.0156	1.047
SG64P10S-66	SG64P19S-66	SG64P21S-66	SG64P26S-66	SG64P28S-66	66	1.0313	1.063
SG64P10S-68	SG64P19S-68	SG64P21S-68	SG64P26S-68	SG64P28S-68	68	1.0625	1.094
SG64P10S-70	SG64P19S-70	SG64P21S-70	SG64P26S-70	SG64P28S-70	70	1.0938	1.125
SG64P10S-72	SG64P19S-72	SG64P21S-72	SG64P26S-72	SG64P28S-72	72	1.1250	1.156
SG64P10S-75	SG64P19S-75	SG64P21S-75	SG64P26S-75	SG64P28S-75	75	1.1719	1.203
SG64P10S-80	SG64P19S-80	SG64P21S-80	SG64P26S-80	SG64P28S-80	80	1.2500	1.281
SG64P10S-85	SG64P19S-85	SG64P21S-85	SG64P26S-85	SG64P28S-85	85	1.3281	1.359
SG64P10S-88	SG64P19S-88	SG64P21S-88	SG64P26S-88	SG64P28S-88	88	1.3750	1.406
SG64P10S-90	SG64P19S-90	SG64P21S-90	SG64P26S-90	SG64P28S-90	90	1.4063	1.438
SG64P10S-95	SG64P19S-95	SG64P21S-95	SG64P26S-95	SG64P28S-95	95	1.4844	1.516
SG64P10S-96	SG64P19S-96	SG64P21S-96	SG64P26S-96	SG64P28S-96	96	1.5000	1.531
SG64P10S-100	SG64P19S-100	SG64P21S-100	SG64P26S-100	SG64P28S-100	100	1.5625	1.594
SG64P10S-104	SG64P19S-104	SG64P21S-104	SG64P26S-104	SG64P28S-104	104	1.6250	1.656
SG64P10S-105	SG64P19S-105	SG64P21S-105	SG64P26S-105	SG64P28S-105	105	1.6406	1.672
SG64P10S-112	SG64P19S-112	SG64P21S-112	SG64P26S-112	SG64P28S-112	112	1.7500	1.781
SG64P10S-120	SG64P19S-120	SG64P21S-120	SG64P26S-120	SG64P28S-120	120	1.8750	1.906
SG64P10S-128	SG64P19S-128	SG64P21S-128	SG64P26S-128	SG64P28S-128	128	2.0000	2.031
SG64P10S-136	SG64P19S-136	SG64P21S-136	SG64P26S-136	SG64P28S-136	136	2.1250	2.156
---	SG64P19S-144	SG64P21S-144	SG64P26S-144	SG64P28S-144	144	2.2500	2.281
---	SG64P19S-160	SG64P21S-160	SG64P26S-160	SG64P28S-160	160	2.5000	2.531
---	SG64P19S-176	SG64P21S-176	SG64P26S-176	SG64P28S-176	176	2.7500	2.781
---	SG64P19S-192	SG64P21S-192	SG64P26S-192	SG64P28S-192	192	3.0000	3.031

▲ Teeth cut into hub. Hub diameter may equal O.D.

Materials:

303 Stainless Steel

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.


SGP-XD
64 Pitch

GEARS

SGP-XD
64 Pitch

64 Pitch Precision Spur Gears - Split Hub

Delrin Gear with Stainless Hub, AGMA Quality 10, 20° Pressure Angle

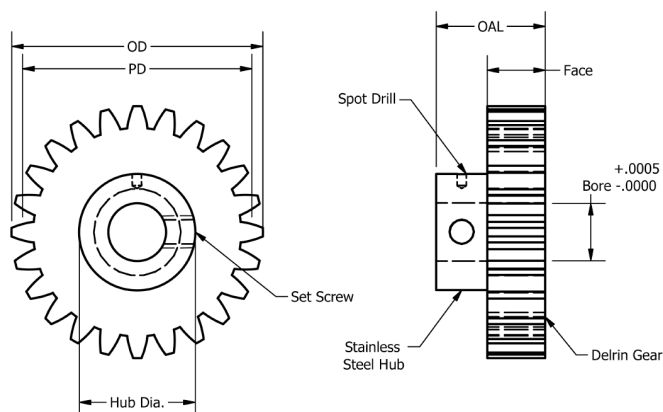

Part Number		No. of Teeth	Pitch Dia. PD	Outside Dia. OD
0.1873 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw	0.2498 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw			
SG64P21XD-36	SG64P28XD-36	36	0.5625	0.594
SG64P21XD-40	SG64P28XD-40	40	0.6250	0.656
SG64P21XD-44	SG64P28XD-44	44	0.6875	0.719
SG64P21XD-45	SG64P28XD-45	45	0.7031	0.734
SG64P21XD-48	SG64P28XD-48	48	0.7500	0.781
SG64P21XD-56	SG64P28XD-56	56	0.8750	0.906
SG64P21XD-64	SG64P28XD-64	64	1.0000	1.031
SG64P21XD-72	SG64P28XD-72	72	1.1250	1.156
SG64P21XD-80	SG64P28XD-80	80	1.2500	1.281
SG64P21XD-88	SG64P28XD-88	88	1.3750	1.406
SG64P21XD-96	SG64P28XD-96	96	1.5000	1.531
SG64P21XD-112	SG64P28XD-112	112	1.7500	1.781
SG64P21XD-120	SG64P28XD-120	120	1.8750	1.906
SG64P21XD-128	SG64P28XD-128	128	2.0000	2.031
SG64P21XD-144	SG64P28XD-144	144	2.2500	2.156
SG64P21XD-160	SG64P28XD-160	160	2.5000	2.281

Materials:

Delrin gear with 303 Stainless Steel hub.

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.

Please call us with your needs.




ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrivesus.com

64 Pitch Precision Spur Gears - Flat

Aluminum, Stainless Steel, Delrin, AGMA Quality 10, 20° Pressure Angle

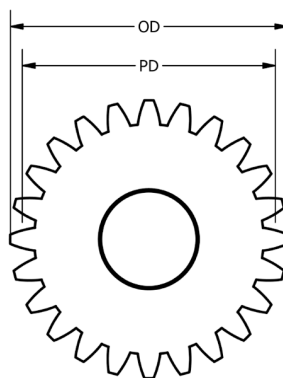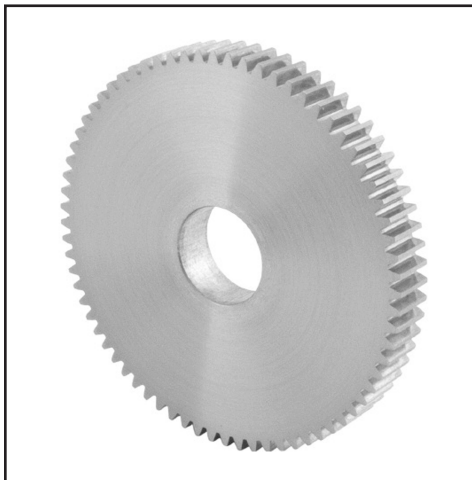

Part Number			No. of Teeth	Pitch Dia. PD	Outside Dia. OD
Aluminum	Stainless Steel	Delrin			
0.3748 Bore 0.125 Face	0.3748 Bore 0.125 Face	0.3748 Bore 0.187 Face			
SG64F3A-38	SG64F3S-38	SG64F5D-38	38	0.5938	0.625
SG64F3A-40	SG64F3S-40	SG64F5D-40	40	0.6250	0.656
SG64F3A-42	SG64F3S-42	SG64F5D-42	42	0.6563	0.688
SG64F3A-44	SG64F3S-44	SG64F5D-44	44	0.6875	0.719
SG64F3A-45	SG64F3S-45	SG64F5D-45	45	0.7031	0.734
SG64F3A-46	SG64F3S-46	SG64F5D-46	46	0.7188	0.750
SG64F3A-48	SG64F3S-48	SG64F5D-48	48	0.7500	0.781
SG64F3A-50	SG64F3S-50	SG64F5D-50	50	0.7813	0.813
SG64F3A-52	SG64F3S-52	SG64F5D-52	52	0.8125	0.844
SG64F3A-54	SG64F3S-54	SG64F5D-54	54	0.8438	0.875
SG64F3A-55	SG64F3S-55	SG64F5D-55	55	0.8594	0.891
SG64F3A-56	SG64F3S-56	SG64F5D-56	56	0.8750	0.906
SG64F3A-58	SG64F3S-58	SG64F5D-58	58	0.9063	0.938
SG64F3A-60	SG64F3S-60	SG64F5D-60	60	0.9375	0.969
SG64F3A-62	SG64F3S-62	SG64F5D-62	62	0.9688	1.000
SG64F3A-64	SG64F3S-64	SG64F5D-64	64	1.0000	1.031
SG64F3A-65	SG64F3S-65	SG64F5D-65	65	1.0156	1.047
SG64F3A-66	SG64F3S-66	SG64F5D-66	66	1.0313	1.063
SG64F3A-68	SG64F3S-68	SG64F5D-68	68	1.0625	1.094

Continued on next page

Materials:

Aluminum - Anodized, 303 Stainless Steel, Delrin

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.




SGF-A/S/D
64 Pitch

GEARS

SGF-A/S/D
64 Pitch

64 Pitch Precision Spur Gears - Flat

Aluminum, Stainless Steel, Delrin, AGMA Quality 10, 20° Pressure Angle

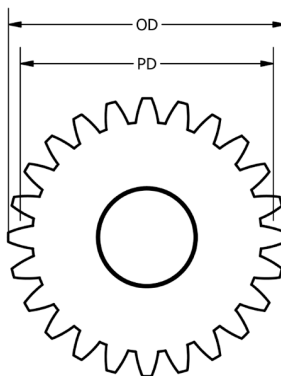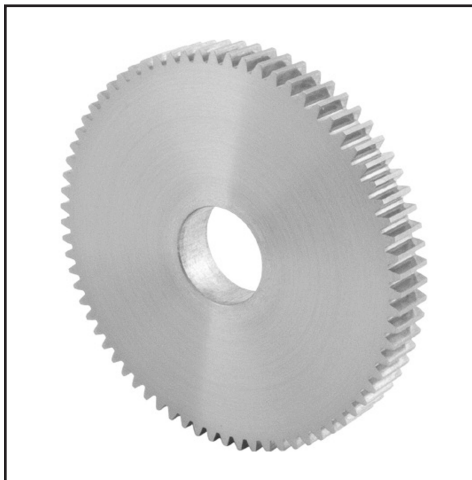

Part Number			No. of Teeth	Pitch Dia. PD	Outside Dia. OD
Aluminum	Stainless Steel	Delrin			
0.3748 Bore 0.125 Face	0.3748 Bore 0.125 Face	0.3748 Bore 0.187 Face			
SG64F3A-70	SG64F3S-70	SG64F5D-70	70	1.0938	1.125
SG64F3A-72	SG64F3S-72	SG64F5D-72	72	1.1250	1.156
SG64F3A-75	SG64F3S-75	SG64F5D-75	75	1.1719	1.203
SG64F3A-80	SG64F3S-80	SG64F5D-80	80	1.2500	1.281
SG64F3A-85	SG64F3S-85	SG64F5D-85	85	1.3281	1.359
SG64F3A-88	SG64F3S-88	SG64F5D-88	88	1.3750	1.406
SG64F3A-90	SG64F3S-90	SG64F5D-90	90	1.4063	1.438
SG64F3A-95	SG64F3S-95	SG64F5D-95	95	1.4844	1.516
SG64F3A-96	SG64F3S-96	SG64F5D-96	96	1.5000	1.531
SG64F3A-100	SG64F3S-100	SG64F5D-100	100	1.5625	1.594
SG64F3A-104	SG64F3S-104	SG64F5D-104	104	1.6250	1.656
SG64F3A-105	SG64F3S-105	SG64F5D-105	105	1.6406	1.672
SG64F3A-112	SG64F3S-112	SG64F5D-112	112	1.7500	1.781
SG64F3A-120	SG64F3S-120	SG64F5D-120	120	1.8750	1.906
SG64F3A-128	SG64F3S-128	SG64F5D-128	128	2.0000	2.031
SG64F3A-136	SG64F3S-136	SG64F5D-136	136	2.1250	2.156
SG64F3A-144	SG64F3S-144	SG64F5D-144	144	2.2500	2.281
SG64F3A-160	SG64F3S-160	SG64F5D-160	160	2.5000	2.531
SG64F3A-176	SG64F3S-176	SG64F5D-176	176	2.7500	2.781
SG64F3A-192	SG64F3S-192	SG64F5D-192	192	3.0000	3.031

Materials:

Aluminum - Anodized, 303 Stainless Steel, Delrin

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.



ondrives.us

☎ 1-888-260-7466
📠 516-771-6444

💻 sales@ondrivesus.com
🌐 www.ondrivesus.com

64 Pitch Precision Spur Gears - Split Hub

Aluminum, Stainless Steel, AGMA Quality 10, 20° Pressure Angle

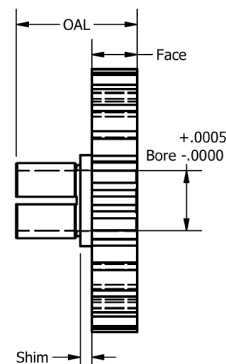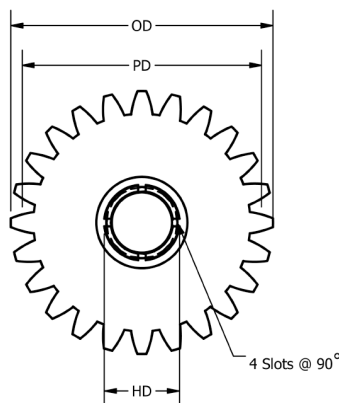

Part Number								
Aluminum			Stainless Steel					
0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL	0.1873 Bore 0.125 Face 0.250 HD 0.406 OAL	0.2498 Bore 0.125 Face 0.312 HD 0.406 OAL	0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL	0.1873 Bore 0.125 Face 0.250 HD 0.406 OAL	0.2498 Bore 0.125 Face 0.312 HD 0.406 OAL	No. of Teeth	Pitch Dia. PD	Outside Dia. OD
SH4-2624.188H Clamp	SH1-2825.250S Clamp	SH1-2825.313S Clamp	SH4-2624.188H Clamp	SH1-2825.250S Clamp	SH1-2825.313S Clamp			
SG64C7A-18	---	---	SG64C7S-18	---	---	18	0.2813	0.313
SG64C7A-19	---	---	SG64C7S-19	---	---	19	0.2969	0.328
SG64C7A-20	---	---	SG64C7S-20	---	---	20	0.3125	0.344
SG64C7A-22	---	---	SG64C7S-22	---	---	22	0.3438	0.375
SG64C7A-24	SG64C14A-24	---	SG64C7S-24	SG64C14S-24	---	24	0.3750	0.406
SG64C7A-25	SG64C14A-25	---	SG64C7S-25	SG64C14S-25	---	25	0.3906	0.422
SG64C7A-26	SG64C14A-26	---	SG64C7S-26	SG64C14S-26	---	26	0.4063	0.438
SG64C7A-28	SG64C14A-28	---	SG64C7S-28	SG64C14S-28	---	28	0.4375	0.469
SG64C7A-30	SG64C14A-30	SG64C18A-30	SG64C7S-30	SG64C14S-30	SG64C18S-30	30	0.4688	0.500
SG64C7A-32	SG64C14A-32	SG64C18A-32	SG64C7S-32	SG64C14S-32	SG64C18S-32	32	0.5000	0.531
SG64C7A-34	SG64C14A-34	SG64C18A-34	SG64C7S-34	SG64C14S-34	SG64C18S-34	34	0.5313	0.563
SG64C7A-35	SG64C14A-35	SG64C18A-35	SG64C7S-35	SG64C14S-35	SG64C18S-35	35	0.5469	0.578
SG64C7A-36	SG64C14A-36	SG64C18A-36	SG64C7S-36	SG64C14S-36	SG64C18S-36	36	0.5625	0.594
SG64C7A-38	SG64C14A-38	SG64C18A-38	SG64C7S-38	SG64C14S-38	SG64C18S-38	38	0.5938	0.625
SG64C7A-40	SG64C14A-40	SG64C18A-40	SG64C7S-40	SG64C14S-40	SG64C18S-40	40	0.6250	0.656
SG64C7A-42	SG64C14A-42	SG64C18A-42	SG64C7S-42	SG64C14S-42	SG64C18S-42	42	0.6563	0.688
SG64C7A-44	SG64C14A-44	SG64C18A-44	SG64C7S-44	SG64C14S-44	SG64C18S-44	44	0.6875	0.719
SG64C7A-45	SG64C14A-45	SG64C18A-45	SG64C7S-45	SG64C14S-45	SG64C18S-45	45	0.7031	0.734
SG64C7A-46	SG64C14A-46	SG64C18A-46	SG64C7S-46	SG64C14S-46	SG64C18S-46	46	0.7188	0.750
SG64C7A-48	SG64C14A-48	SG64C18A-48	SG64C7S-48	SG64C14S-48	SG64C18S-48	48	0.7500	0.781
SG64C7A-50	SG64C14A-50	SG64C18A-50	SG64C7S-50	SG64C14S-50	SG64C18S-50	50	0.7813	0.813
SG64C7A-52	SG64C14A-52	SG64C18A-52	SG64C7S-52	SG64C14S-52	SG64C18S-52	52	0.8125	0.844
SG64C7A-54	SG64C14A-54	SG64C18A-54	SG64C7S-54	SG64C14S-54	SG64C18S-54	54	0.8438	0.875
SG64C7A-55	SG64C14A-55	SG64C18A-55	SG64C7S-55	SG64C14S-55	SG64C18S-55	55	0.8594	0.891
SG64C7A-56	SG64C14A-56	SG64C18A-56	SG64C7S-56	SG64C14S-56	SG64C18S-56	56	0.8750	0.906
SG64C7A-58	SG64C14A-58	SG64C18A-58	SG64C7S-58	SG64C14S-58	SG64C18S-58	58	0.9063	0.938

Continued on next page

Materials:

Aluminum - Anodized, 303 Stainless Steel



On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.

64 Pitch Precision Spur Gears - Split Hub

Aluminum, Stainless Steel, AGMA Quality 10, 20° Pressure Angle

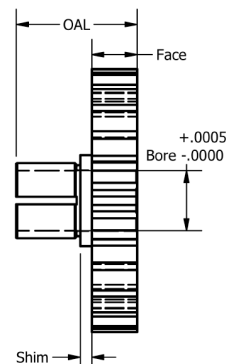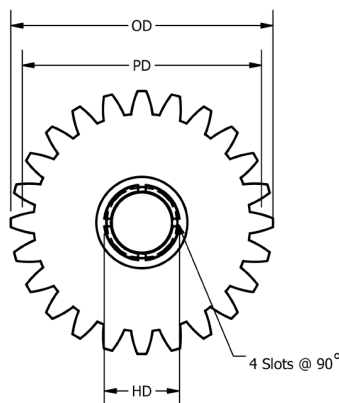

Part Number								
Aluminum			Stainless Steel					
0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL SH4-2624.188H Clamp	0.1873 Bore 0.125 Face 0.250 HD 0.406 OAL SH1-2825.250S Clamp	0.2498 Bore 0.125 Face 0.312 HD 0.406 OAL SH1-2825.313S Clamp	0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL SH4-2624.188H Clamp	0.1873 Bore 0.125 Face 0.250 HD 0.406 OAL SH1-2825.250S Clamp	0.2498 Bore 0.125 Face 0.312 HD 0.406 OAL SH1-2825.313S Clamp	No. of Teeth	Pitch Dia. PD	Outside Dia. OD
SG64C7A-60	SG64C14A-60	SG64C18A-60	SG64C7S-60	SG64C14S-60	SG64C18S-60	60	0.9375	0.968
SG64C7A-62	SG64C14A-62	SG64C18A-62	SG64C7S-62	SG64C14S-62	SG64C18S-62	62	0.9688	1.000
SG64C7A-64	SG64C14A-64	SG64C18A-64	SG64C7S-64	SG64C14S-64	SG64C18S-64	64	1.0000	1.031
SG64C7A-65	SG64C14A-65	SG64C18A-65	SG64C7S-65	SG64C14S-65	SG64C18S-65	65	1.0156	1.046
SG64C7A-66	SG64C14A-66	SG64C18A-66	SG64C7S-66	SG64C14S-66	SG64C18S-66	66	1.0313	1.062
SG64C7A-68	SG64C14A-68	SG64C18A-68	SG64C7S-68	SG64C14S-68	SG64C18S-68	68	1.0625	1.093
SG64C7A-70	SG64C14A-70	SG64C18A-70	SG64C7S-70	SG64C14S-70	SG64C18S-70	70	1.0938	1.125
SG64C7A-72	SG64C14A-72	SG64C18A-72	SG64C7S-72	SG64C14S-72	SG64C18S-72	72	1.1250	1.156
SG64C7A-75	SG64C14A-75	SG64C18A-75	SG64C7S-75	SG64C14S-75	SG64C18S-75	75	1.1719	1.203
SG64C7A-80	SG64C14A-80	SG64C18A-80	SG64C7S-80	SG64C14S-80	SG64C18S-80	80	1.2500	1.281
SG64C7A-85	SG64C14A-85	SG64C18A-85	SG64C7S-85	SG64C14S-85	SG64C18S-85	85	1.3281	1.359
SG64C7A-88	SG64C14A-88	SG64C18A-88	SG64C7S-88	SG64C14S-88	SG64C18S-88	88	1.3750	1.406
SG64C7A-90	SG64C14A-90	SG64C18A-90	SG64C7S-90	SG64C14S-90	SG64C18S-90	90	1.4063	1.437
SG64C7A-95	SG64C14A-95	SG64C18A-95	SG64C7S-95	SG64C14S-95	SG64C18S-95	95	1.4844	1.516
SG64C7A-96	SG64C14A-96	SG64C18A-96	SG64C7S-96	SG64C14S-96	SG64C18S-96	96	1.5000	1.531
SG64C7A-100	SG64C14A-100	SG64C18A-100	SG64C7S-100	SG64C14S-100	SG64C18S-100	100	1.5625	1.593
SG64C7A-104	SG64C14A-104	SG64C18A-104	SG64C7S-104	SG64C14S-104	SG64C18S-104	104	1.6250	1.656
SG64C7A-105	SG64C14A-105	SG64C18A-105	SG64C7S-105	SG64C14S-105	SG64C18S-105	105	1.6406	1.671
SG64C7A-112	SG64C14A-112	SG64C18A-112	SG64C7S-112	SG64C14S-112	SG64C18S-112	112	1.7500	1.781
SG64C7A-120	SG64C14A-120	SG64C18A-120	SG64C7S-120	SG64C14S-120	SG64C18S-120	120	1.8750	1.906
---	SG64C14A-128	SG64C18A-128	---	SG64C14S-128	SG64C18S-128	128	2.0000	2.031
---	SG64C14A-136	SG64C18A-136	---	SG64C14S-136	SG64C18S-136	136	2.1250	2.156
---	SG64C14A-144	SG64C18A-144	---	SG64C14S-144	SG64C18S-144	144	2.2500	2.281
---	---	SG64C18A-160	---	---	SG64C18S-160	160	2.5000	2.531
---	---	SG64C18A-176	---	---	SG64C18S-176	176	2.7500	2.781
---	---	SG64C18A-192	---	---	SG64C18S-192	192	3.0000	3.031

Materials:

Aluminum - Anodized, 303 Stainless Steel

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.

Please call us with your needs.