



BLHM70

GEARBOXES

BLHM70

Bevel Heavy Duty Gearbox - Counter Rotating Outputs

Hardened Spiral Bevels 26 – 128 Nm **1:1 - 2:1**

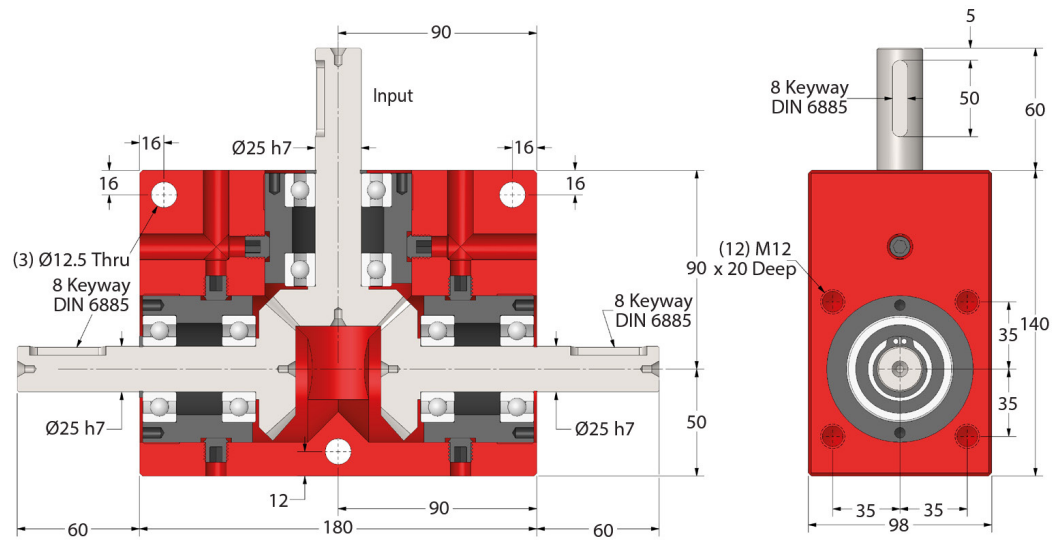

Part Number			Ratio	Efficiency at 1000 RPM
Standard ≈1°	Low Standard ≤30'	Red. Standard ≤10'		
BLHM70-1	BLHM70-1A	BLHM70-1AR	1:1	88%
BLHM70-2	BLHM70-2A	BLHM70-2AR	2:1	88%

Weight: 8.762 kg approx.

Output Backlash: ≈1°.

Max. Input Speed: 3,000 Rpm.

Greased for Life: Shell Gadus S2 V220AD 2.

Input/Output Key: KK8-7-50.

Testing in your application is necessary.

You will need to assess duty cycles and confirm gearbox suitability with your own calculations.

All figures listed are to be used for guidance only.

Output Torque Nm

RPM Input	Reduction Ratio	
	1:1	2:1
3000	26.0	19.0
2000	30.0	22.0
1750	31.3	22.8
1000	35.0	25.0
500	40.0	29.0
100	53.0	38.0
50	57.0	43.0
10	70.0	52.0

ondrives.us

☎ 1-888-260-7466

📄 516-771-6444

💻 sales@ondrivesus.com

🌐 www.ondrivesus.com