


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

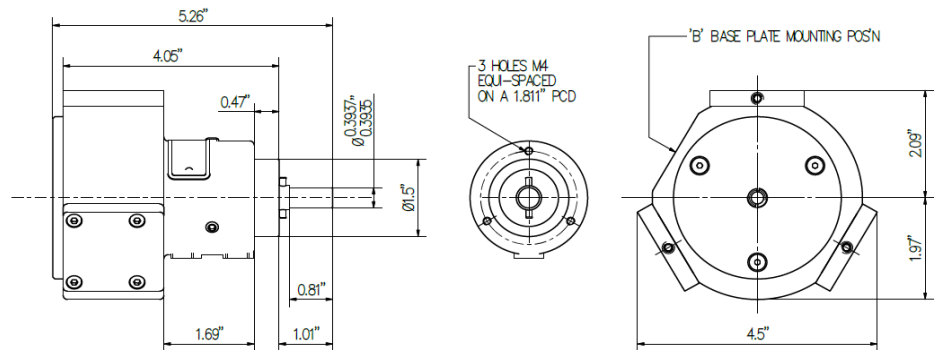

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-1A	Body Mount	Aluminum	1/8" BSP	200 - 800 RPM	3.3 lbs

Torque at 200 rpm / 6.9 bar (100 psi)

24.7 in.lb

Torque at 800 rpm / 6.9 bar (100 psi)

14.7 in.lb

Max air consumption 800 rpm / 6.9 bar

5.70 ft³/min




Shaft Diameter

0.394"

Available on Request:

Air Motors with Gearboxes

*Also available in Flange Mount, Base Mount, NEMA flanges, and Acetal Housing on REQUEST

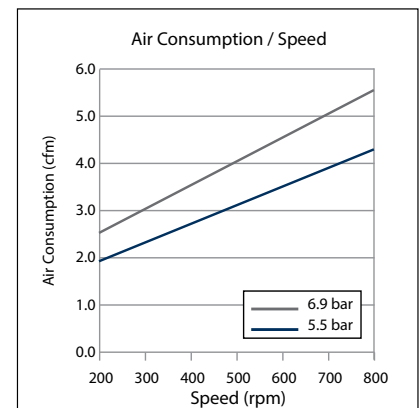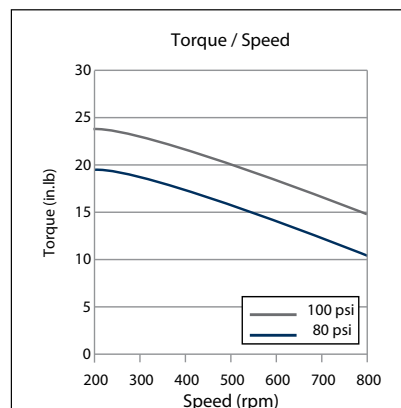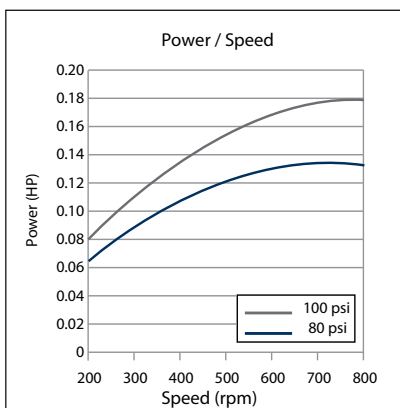

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

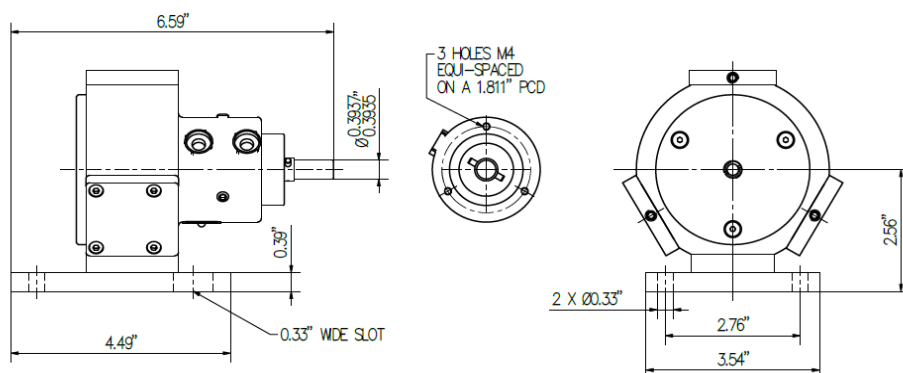

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-1B	Base Mount	Aluminum	1/8" BSP	200 - 800 RPM	3.3 lbs

Torque at 200 rpm / 6.9 bar (100 psi)

24.7 in.lb

Torque at 800 rpm / 6.9 bar (100 psi)

14.7 in.lb

Max air consumption 800 rpm / 6.9 bar

5.70 ft³/min




Shaft Diameter

0.394"

Available on Request:

Air Motors with Gearboxes

*Also available in Flange Mount, Body Mount, NEMA flanges, and Acetal Housing on REQUEST

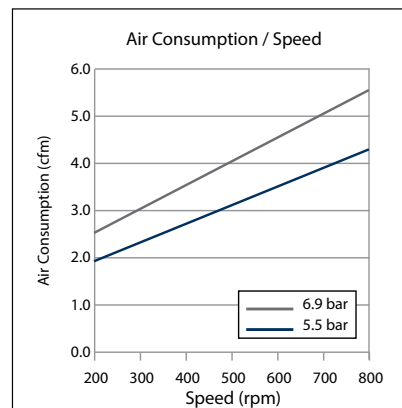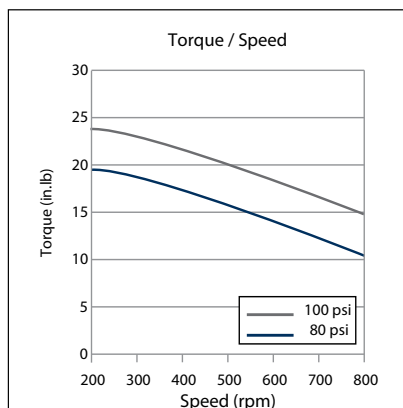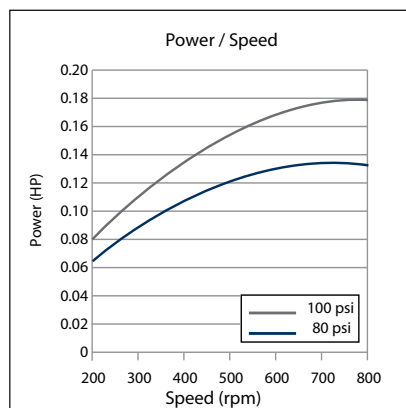

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us



ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

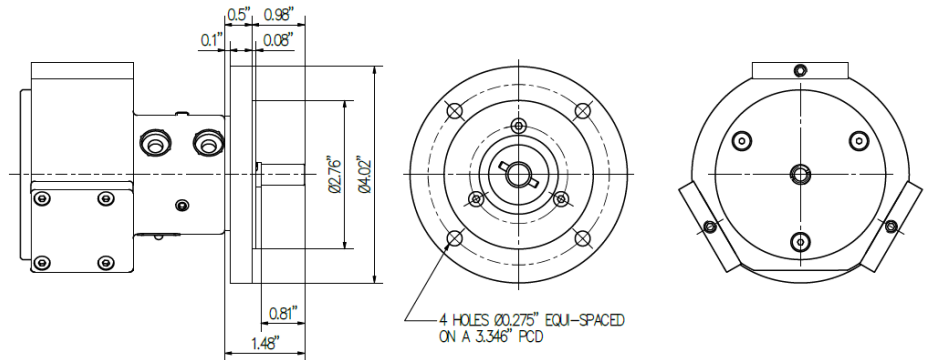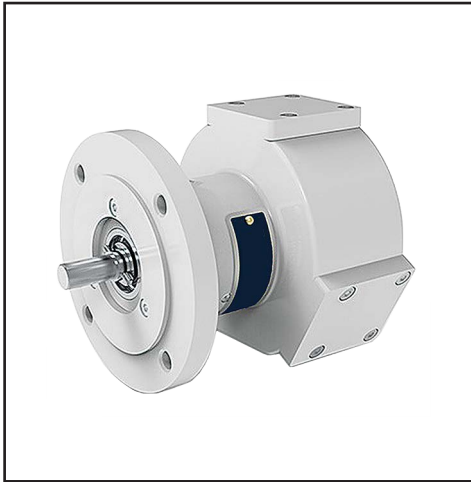

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-1C	Flange Mount	Aluminum	1/8" BSP	200 - 800 RPM	3.3 lbs

Torque at 200 rpm / 6.9 bar (100 psi)

24.7 in.lb

Torque at 800 rpm / 6.9 bar (100 psi)

14.7 in.lb

Max air consumption 800 rpm / 6.9 bar

5.70 ft³/min

Shaft Diameter




0.394"

Available on Request:

Air Motors with Gearboxes

NEMA Flange Mount

*Also available in Body Mount and Base Mount on REQUEST

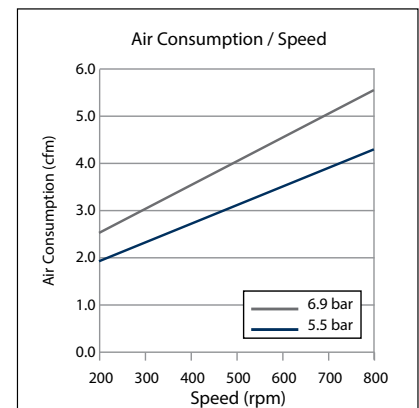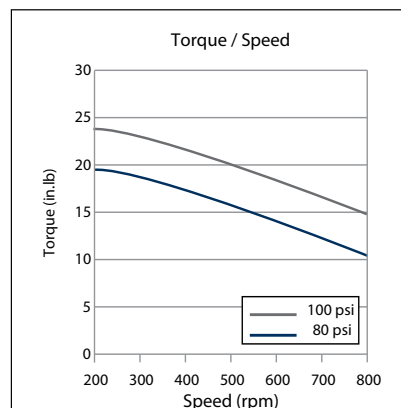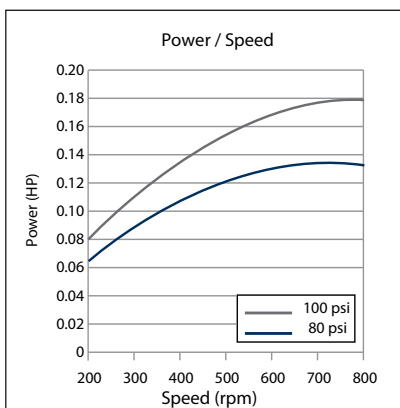

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA



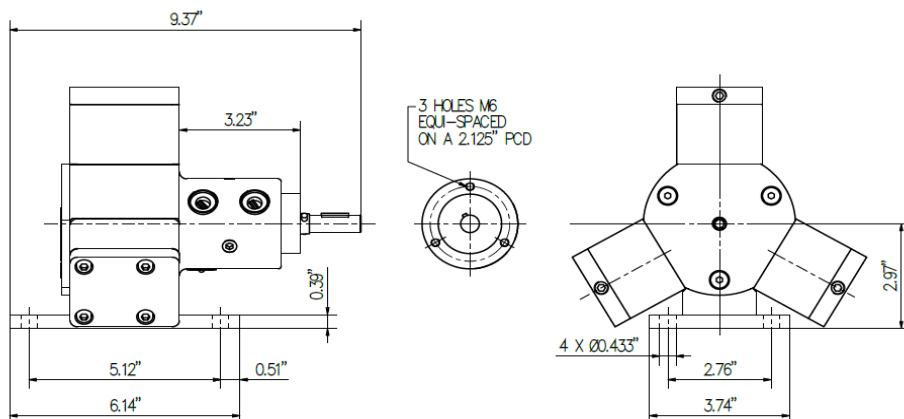


Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-3B	Base Mount	Aluminum	1/4" BSP	150 - 700 RPM	8.3 lbs

Torque at 200 rpm / 6.9 bar (100 psi)	87 in.lb
Torque at 700 rpm / 6.9 bar (100 psi)	41 in.lb
Max air consumption 700 rpm / 6.9 bar	12.7 ft ³ /min
Shaft Diameter	0.5"

Available on Request:
Air Motors with Gearboxes
Lubricated Air Motors

*Also available in Flange Mount, Body Mount, NEMA flanges, and Acetal Housing on REQUEST

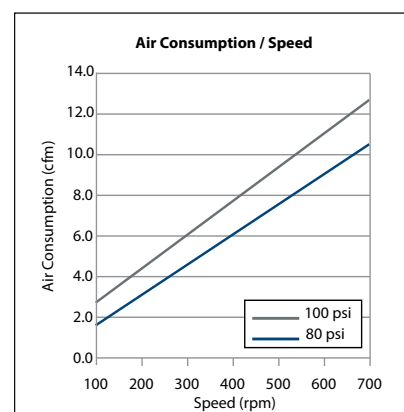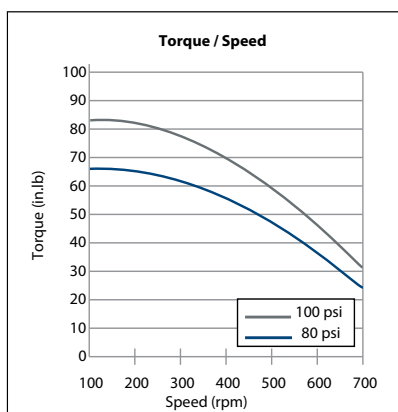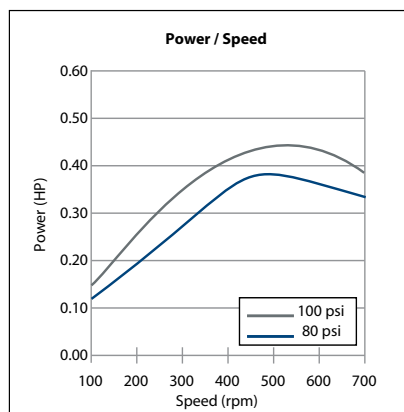

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrives.us


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA

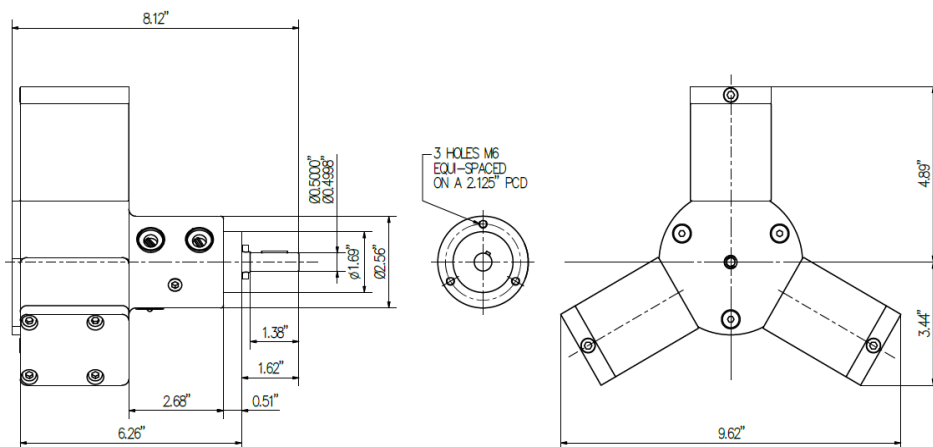

Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-7A	Body Mount	Aluminum	1/4" BSP	100 - 400 RPM	10 lbs

Torque at 100 rpm / 6.9 bar (100 psi)

139 in.lb

Torque at 400 rpm / 6.9 bar (100 psi)

69 in.lb

Max air consumption 400 rpm / 6.9 bar

7.0 ft³/min

Shaft Diameter




0.5"

Available on Request:

Air Motors with Gearboxes

Lubricated Air Motors

*Also available in Flange Mount, Base Mount, NEMA flanges, and Acetal Housing on REQUEST

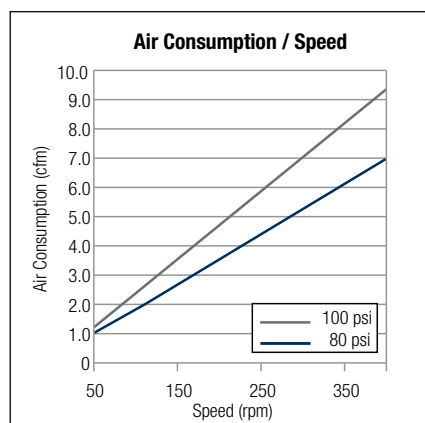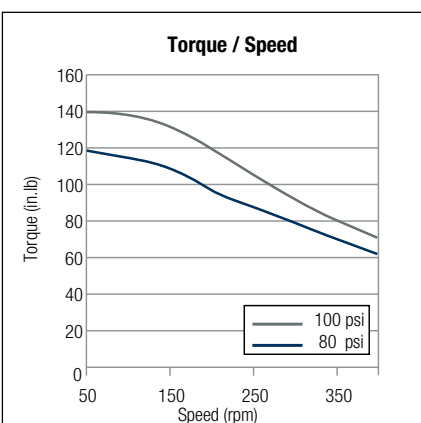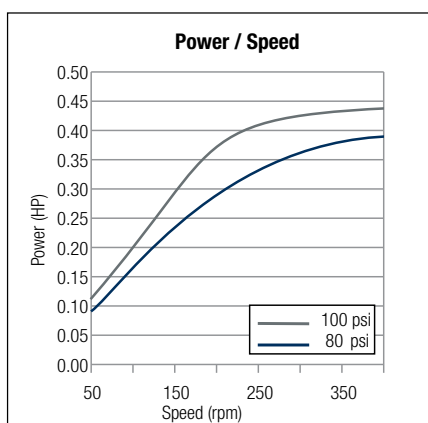

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrives.us



ATA

AIR-TORQUE

ATA

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply


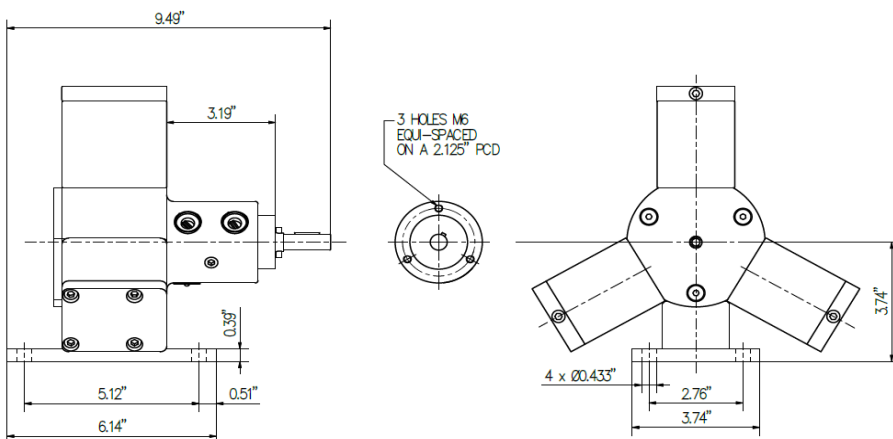
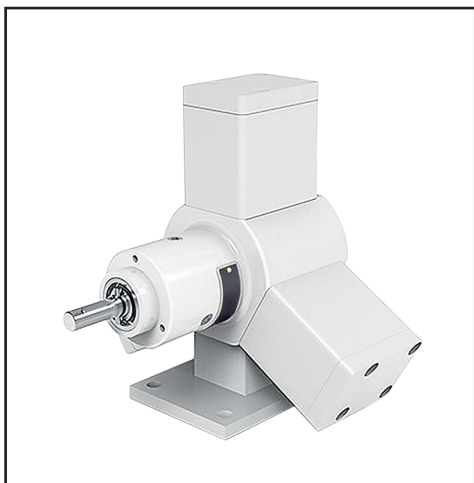


Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-7B	Base Mount	Aluminum	1/4" BSP	100 - 400 RPM	10 lbs

Torque at 100 rpm / 6.9 bar (100 psi)	139 in.lb
Torque at 400 rpm / 6.9 bar (100 psi)	69 in.lb
Max air consumption 400 rpm / 6.9 bar	7.0 ft ³ /min
Shaft Diameter	0.5"

Available on Request:
Air Motors with Gearboxes
Lubricated Air Motors

*Also available in Flange Mount, Body Mount, NEMA flanges, and Acetal Housing on REQUEST

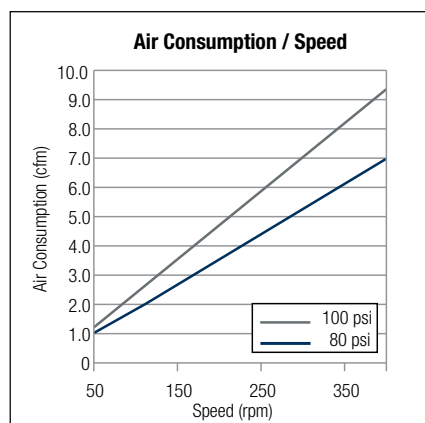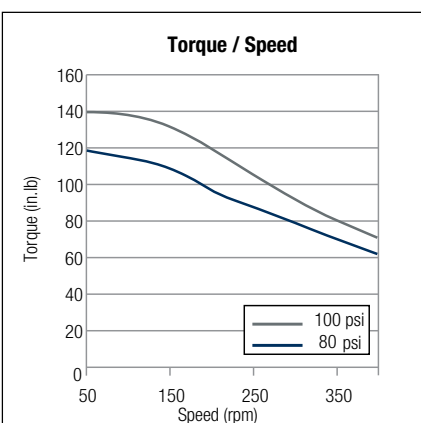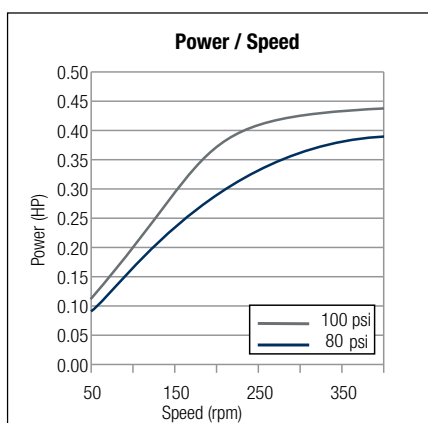

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrives.us


ATA

AIR-TORQUE

Piston Air Motors

Non-lubricated; Operates with either dry or lubricated air supply

ATA



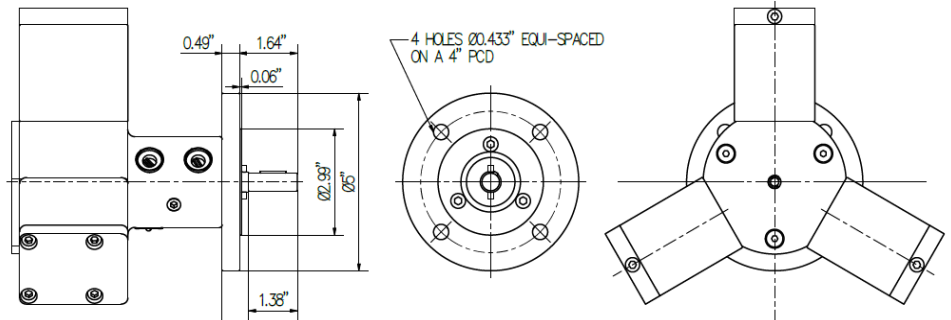


Part Number	Type	Housing	Ports	Speed Range	Weight
ATA-7C	Flange Mount	Aluminum	1/4" BSP	100 - 400 RPM	10 lbs

Torque at 100 rpm / 6.9 bar (100 psi)	139 in.lb
Torque at 400 rpm / 6.9 bar (100 psi)	69 in.lb
Max air consumption 400 rpm / 6.9 bar	7.0 ft ³ /min
Shaft Diameter	0.5"

Available on Request:
Air Motors with Gearboxes
Lubricated Air Motors
NEMA Flange Mount

*Also available in Body Mount and Base Mount on REQUEST

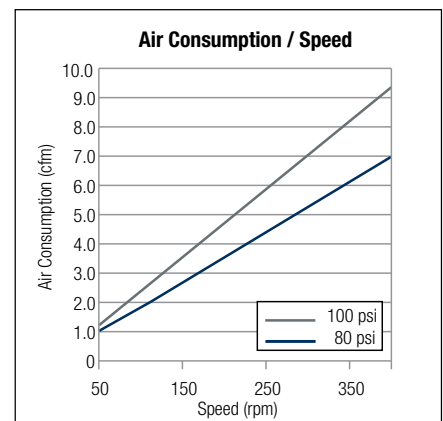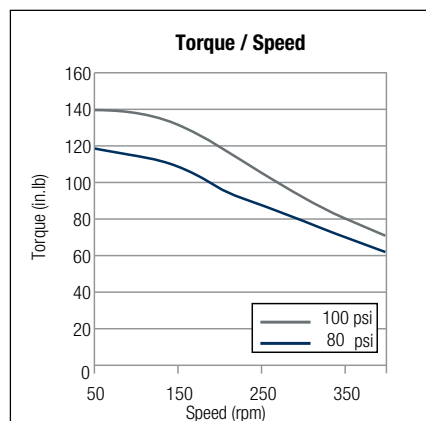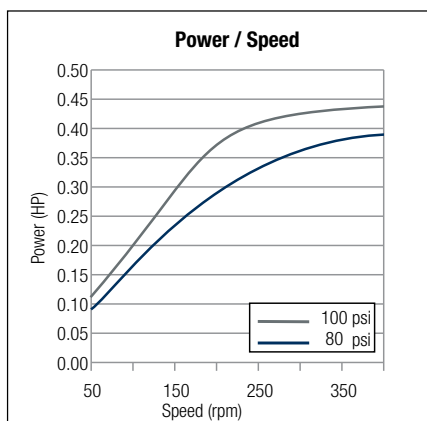

Testing in your application is necessary. All figures listed are to be used for guidance only.

ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrives.us