

**BLH50
BLHT50**

GEARBOXES


**BLH50
BLHT50**

Spiral Bevel & Spiral Bevel Tee Heavy Duty Gearbox




Hardened Spiral Bevels 7.7 – 30 Nm 1:1 - 2:1
Metric Shaft Diameters



BLH50

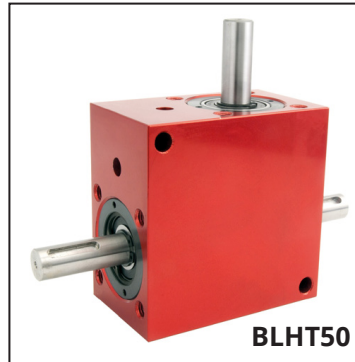

BLHT50

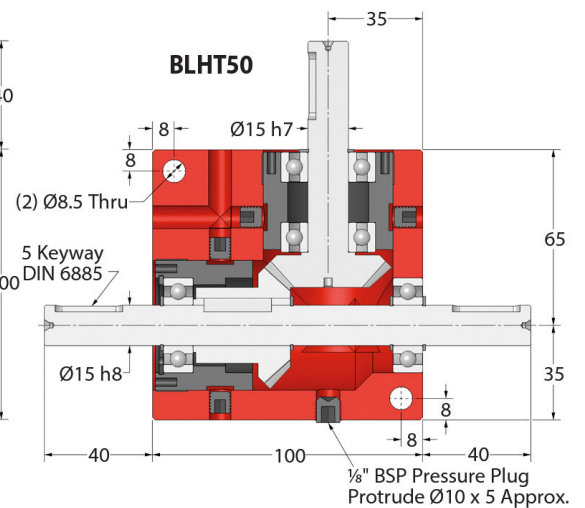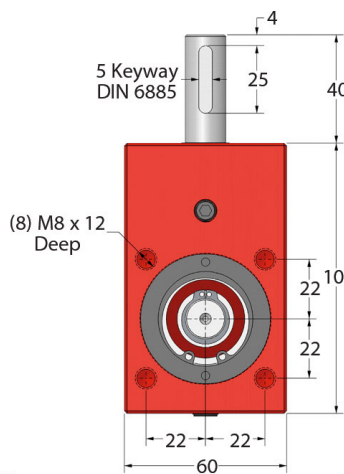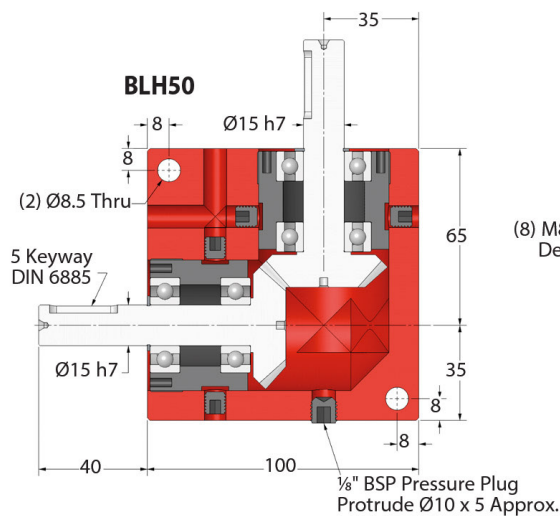

Part Number			Ratio	Efficiency at 1000 RPM	Reflected Inertia at Input (kg.m ²)
Standard ≈1°	Low Standard ≤30'	Red. Standard ≤10'			
BLH50-1	BLH50-1A	BLH50-1AR	1:1	88%	4.76 x 10 ⁻⁵
BLH50-2	BLH50-2A	BLH50-2AR	2:1	88%	1.25 x 10 ⁻⁵
BLHT50-1	BLHT50-1A	BLHT50-1AR	1:1	88%	4.76 x 10 ⁻⁵
BLHT50-2	BLHT50-2A	BLHT50-2AR	2:1	88%	1.25 x 10 ⁻⁵

Weight: BLH: 2.20 kg, BLHT: 2.31 kg.

Output Backlash: ≈1°.

Max. Input Speed: 3000 Rpm.

Greased for Life: Shell Gadus S2 V220AD 2.

Input/Output Key: KK5-25.

Testing in your application is necessary.
You will need to assess duty cycles and confirm gearbox suitability with your own calculations.
All figures listed are to be used for guidance only.

Output Torque Nm

RPM Input	Reduction Ratio	
	1:1	2:1
3000	11.5	7.7
2000	13.2	8.7
1750	13.9	9.1
1000	15.9	10.2
500	17.5	11.6
100	23.0	15.0
50	25.0	17.0
10	30.0	20.0

ondrives.us

1-888-260-7466

516-771-6444

sales@ondrivesus.com

www.ondrivesus.com