
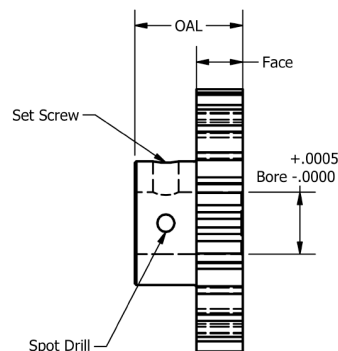


96 Pitch Precision Spur Gears - Set Screw Hub

Aluminum - Anodized, AGMA Quality 10, 20° Pressure Angle

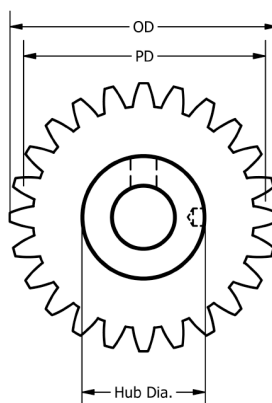

Part Number						No. of Teeth	Pitch Dia. PD	Outside Dia. OD
Aluminum			Stainless Steel					
0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw			
SG96P10A-24▲	---	---	SG96P10S-24▲	---	---	24	0.2500	0.271
SG96P10A-25▲	---	---	SG96P10S-25▲	---	---	25	0.2604	0.281
SG96P10A-26▲	---	---	SG96P10S-26▲	---	---	26	0.2708	0.292
SG96P10A-27▲	---	---	SG96P10S-27▲	---	---	27	0.2813	0.302
SG96P10A-28▲	---	---	SG96P10S-28▲	---	---	28	0.2917	0.313
SG96P10A-29▲	---	---	SG96P10S-29▲	---	---	29	0.3021	0.323
SG96P10A-30▲	---	---	SG96P10S-30▲	---	---	30	0.3125	0.333
SG96P10A-32	SG96P19A-32▲	---	SG96P10S-32	SG96P19S-32▲	---	32	0.3333	0.354
SG96P10A-34	SG96P19A-34▲	---	SG96P10S-34	SG96P19S-34▲	---	34	0.3542	0.375
SG96P10A-35	SG96P19A-35▲	---	SG96P10S-35	SG96P19S-35▲	---	35	0.3646	0.385
SG96P10A-36	SG96P19A-36▲	---	SG96P10S-36	SG96P19S-36▲	---	36	0.3750	0.396
SG96P10A-38	SG96P19A-38	---	SG96P10S-38	SG96P19S-38	---	38	0.3958	0.417
SG96P10A-39	SG96P19A-39	---	SG96P10S-39	SG96P19S-39	---	39	0.4063	0.427
SG96P10A-40	SG96P19A-40	---	SG96P10S-40	SG96P19S-40	---	40	0.4167	0.438
SG96P10A-42	SG96P19A-42	---	SG96P10S-42	SG96P19S-42	---	42	0.4375	0.458
SG96P10A-44	SG96P19A-44	---	SG96P10S-44	SG96P19S-44	---	44	0.4583	0.479
SG96P10A-45	SG96P19A-45	SG96P26A-45▲	SG96P10S-45	SG96P19S-45	SG96P26S-45▲	45	0.4688	0.490
SG96P10A-47	SG96P19A-47	SG96P26A-47▲	SG96P10S-47	SG96P19S-47	SG96P26S-47▲	47	0.4896	0.510
SG96P10A-48	SG96P19A-48	SG96P26A-48▲	SG96P10S-48	SG96P19S-48	SG96P26S-48▲	48	0.5000	0.521
SG96P10A-50	SG96P19A-50	SG96P26A-50	SG96P10S-50	SG96P19S-50	SG96P26S-50	50	0.5208	0.542
SG96P10A-52	SG96P19A-52	SG96P26A-52	SG96P10S-52	SG96P19S-52	SG96P26S-52	52	0.5417	0.563
SG96P10A-54	SG96P19A-54	SG96P26A-54	SG96P10S-54	SG96P19S-54	SG96P26S-54	54	0.5625	0.583
SG96P10A-55	SG96P19A-55	SG96P26A-55	SG96P10S-55	SG96P19S-55	SG96P26S-55	55	0.5729	0.594
SG96P10A-56	SG96P19A-56	SG96P26A-56	SG96P10S-56	SG96P19S-56	SG96P26S-56	56	0.5833	0.604
SG96P10A-58	SG96P19A-58	SG96P26A-58	SG96P10S-58	SG96P19S-58	SG96P26S-58	58	0.6042	0.625

▲ Teeth cut into hub. Hub diameter may equal O.D.

Continued on next page

Materials:

Aluminum - anodized

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.



SGP-A/S
96 Pitch

GEARS

SGP-A/S
96 Pitch

96 Pitch Precision Spur Gears - Set Screw Hub

Aluminum - Anodized, AGMA Quality 10, 20° Pressure Angle

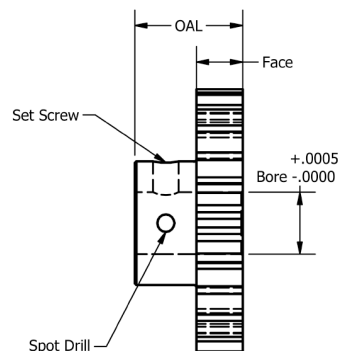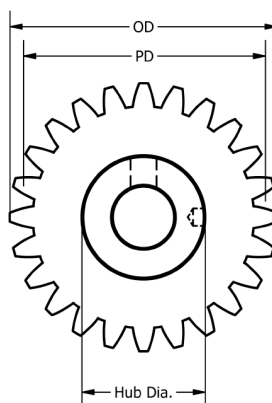

Part Number								
Aluminum			Stainless Steel					
0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	0.1248 Bore 0.125 Face 0.313 HD 0.313 OAL #2-56 Screw	0.1873 Bore 0.125 Face 0.375 HD 0.344 OAL #4-40 Screw	0.2498 Bore 0.125 Face 0.500 HD 0.375 OAL #6-32 Screw	No. of Teeth	Pitch Dia. PD	Outside Dia. OD
SG96P10A-60	SG96P19A-60	SG96P26A-60	SG96P10S-60	SG96P19S-60	SG96P26S-60	60	0.6250	0.646
SG96P10A-62	SG96P19A-62	SG96P26A-62	SG96P10S-62	SG96P19S-62	SG96P26S-62	62	0.6458	0.667
SG96P10A-64	SG96P19A-64	SG96P26A-64	SG96P10S-64	SG96P19S-64	SG96P26S-64	64	0.6667	0.688
SG96P10A-65	SG96P19A-65	SG96P26A-65	SG96P10S-65	SG96P19S-65	SG96P26S-65	65	0.6771	0.698
SG96P10A-66	SG96P19A-66	SG96P26A-66	SG96P10S-66	SG96P19S-66	SG96P26S-66	66	0.6875	0.708
SG96P10A-70	SG96P19A-70	SG96P26A-70	SG96P10S-70	SG96P19S-70	SG96P26S-70	70	0.7292	0.750
SG96P10A-72	SG96P19A-72	SG96P26A-72	SG96P10S-72	SG96P19S-72	SG96P26S-72	72	0.7500	0.771
SG96P10A-75	SG96P19A-75	SG96P26A-75	SG96P10S-75	SG96P19S-75	SG96P26S-75	75	0.7813	0.802
SG96P10A-78	SG96P19A-78	SG96P26A-78	SG96P10S-78	SG96P19S-78	SG96P26S-78	78	0.8125	0.833
SG96P10A-80	SG96P19A-80	SG96P26A-80	SG96P10S-80	SG96P19S-80	SG96P26S-80	80	0.8333	0.854
SG96P10A-84	SG96P19A-84	SG96P26A-84	SG96P10S-84	SG96P19S-84	SG96P26S-84	84	0.8750	0.896
SG96P10A-85	SG96P19A-85	SG96P26A-85	SG96P10S-85	SG96P19S-85	SG96P26S-85	85	0.8854	0.906
SG96P10A-90	SG96P19A-90	SG96P26A-90	SG96P10S-90	SG96P19S-90	SG96P26S-90	90	0.9375	0.958
SG96P10A-95	SG96P19A-95	SG96P26A-95	SG96P10S-95	SG96P19S-95	SG96P26S-95	95	0.9896	1.010
SG96P10A-96	SG96P19A-96	SG96P26A-96	SG96P10S-96	SG96P19S-96	SG96P26S-96	96	1.0000	1.021
SG96P10A-100	SG96P19A-100	SG96P26A-100	SG96P10S-100	SG96P19S-100	SG96P26S-100	100	1.0417	1.063
SG96P10A-105	SG96P19A-105	SG96P26A-105	SG96P10S-105	SG96P19S-105	SG96P26S-105	105	1.0938	1.115
SG96P10A-110	SG96P19A-110	SG96P26A-110	SG96P10S-110	SG96P19S-110	SG96P26S-110	110	1.1458	1.167
SG96P10A-120	SG96P19A-120	SG96P26A-120	SG96P10S-120	SG96P19S-120	SG96P26S-120	120	1.2500	1.271
SG96P10A-126	SG96P19A-126	SG96P26A-126	SG96P10S-126	SG96P19S-126	SG96P26S-126	126	1.3125	1.333
SG96P10A-132	SG96P19A-132	SG96P26A-132	SG96P10S-132	SG96P19S-132	SG96P26S-132	132	1.3750	1.396
SG96P10A-144	SG96P19A-144	SG96P26A-144	SG96P10S-144	SG96P19S-144	SG96P26S-144	144	1.5000	1.521
SG96P10A-156	SG96P19A-156	SG96P26A-156	SG96P10S-156	SG96P19S-156	SG96P26S-156	156	1.6250	1.646
SG96P10A-168	SG96P19A-168	SG96P26A-168	SG96P10S-168	SG96P19S-168	SG96P26S-168	168	1.7500	1.771
SG96P10A-192	SG96P19A-192	SG96P26A-192	SG96P10S-192	SG96P19S-192	SG96P26S-192	192	2.0000	2.021

▲ Teeth cut into hub. Hub diameter may equal O.D.

Materials:

Aluminum - anodized

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.

ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrivesus.com


SGP-XD
96 Pitch

GEARS

SGP-XD
96 Pitch

96 Pitch Precision Spur Gears - Split Hub

Delrin Gear with Stainless Hub, AGMA Quality 10, 20° Pressure Angle

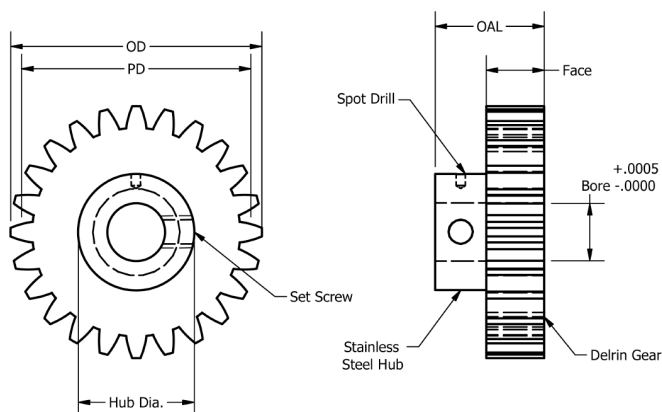

Part Number		No. of Teeth	Pitch Dia. PD	Outside Dia. OD
0.1873 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw	0.2498 Bore 0.188 Face 0.500 HD 0.438 OAL #6-32 Screw			
SG96P21XD-60	SG96P28XD-60	60	0.6250	0.646
SG96P21XD-64	SG96P28XD-64	64	0.6667	0.688
SG96P21XD-72	SG96P28XD-72	72	0.7500	0.771
SG96P21XD-84	SG96P28XD-84	84	0.8750	0.896
SG96P21XD-96	SG96P28XD-96	96	1.0000	1.021
SG96P21XD-104	SG96P28XD-104	104	1.0833	1.104
SG96P21XD-108	SG96P28XD-108	108	1.1250	1.146
SG96P21XD-110	SG96P28XD-110	110	1.1458	1.167
SG96P21XD-112	SG96P28XD-112	112	1.1667	1.188
SG96P21XD-116	SG96P28XD-116	116	1.2083	1.229
SG96P21XD-120	SG96P28XD-120	120	1.2500	1.271
SG96P21XD-128	SG96P28XD-128	128	1.3333	1.354
SG96P21XD-144	SG96P28XD-144	144	1.5000	1.521
SG96P21XD-156	SG96P28XD-156	156	1.6250	1.646
SG96P21XD-168	SG96P28XD-168	168	1.7500	1.771
SG96P21XD-180	SG96P28XD-180	180	1.8854	1.896
SG96P21XD-192	SG96P28XD-192	192	2.0000	2.021

Materials:

Delrin gear with 303 Stainless Steel hub.

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.




ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrivesus.com

96 Pitch Precision Spur Gears - Flat

Aluminum, Stainless Steel, Delrin, AGMA Quality 10, 20° Pressure Angle

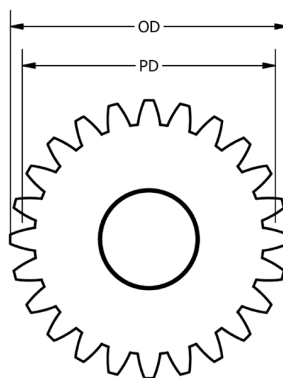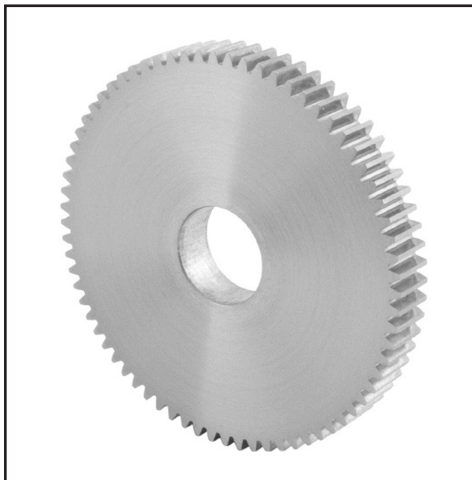

Part Number			No. of Teeth	Pitch Dia. PD	Outside Dia. OD
Aluminum	Stainless Steel	Delrin			
0.3748 Bore 0.125 Face	0.3748 Bore 0.125 Face	0.3748 Bore 0.187 Face			
SG96F3A-70	SG96F3S-70	SG96F5D-70	70	0.7292	0.750
SG96F3A-72	SG96F3S-72	SG96F5D-72	72	0.7500	0.771
SG96F3A-75	SG96F3S-75	SG96F5D-75	75	0.7813	0.802
SG96F3A-78	SG96F3S-78	SG96F5D-78	78	0.8125	0.833
SG96F3A-80	SG96F3S-80	SG96F5D-80	80	0.8333	0.854
SG96F3A-84	SG96F3S-84	SG96F5D-84	84	0.8750	0.896
SG96F3A-85	SG96F3S-85	SG96F5D-85	85	0.8854	0.906
SG96F3A-90	SG96F3S-90	SG96F5D-90	90	0.9375	0.958
SG96F3A-95	SG96F3S-95	SG96F5D-95	95	0.9896	1.010
SG96F3A-96	SG96F3S-96	SG96F5D-96	96	1.0000	1.021
SG96F3A-100	SG96F3S-100	SG96F5D-100	100	1.0417	1.063
SG96F3A-105	SG96F3S-105	SG96F5D-105	105	1.0938	1.115
SG96F3A-110	SG96F3S-110	SG96F5D-110	110	1.1458	1.167
SG96F3A-120	SG96F3S-120	SG96F5D-120	120	1.2500	1.271
SG96F3A-126	SG96F3S-126	SG96F5D-126	126	1.3125	1.333
SG96F3A-132	SG96F3S-132	SG96F5D-132	132	1.3750	1.396
SG96F3A-144	SG96F3S-144	SG96F5D-144	144	1.5000	1.521
SG96F3A-156	SG96F3S-156	SG96F5D-156	156	1.6250	1.646
SG96F3A-168	SG96F3S-168	SG96F5D-168	168	1.7500	1.771
SG96F3A-192	SG96F3S-192	SG96F5D-192	192	2.0000	2.021

Materials:

Aluminum - Anodized, 303 Stainless Steel, Delrin



On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.

96 Pitch Precision Spur Gears - Split Hub

Aluminum, Stainless Steel, AGMA Quality 10, 20° Pressure Angle

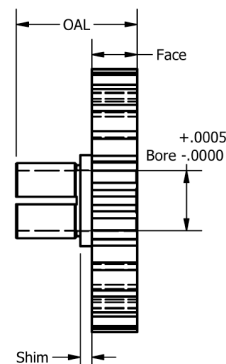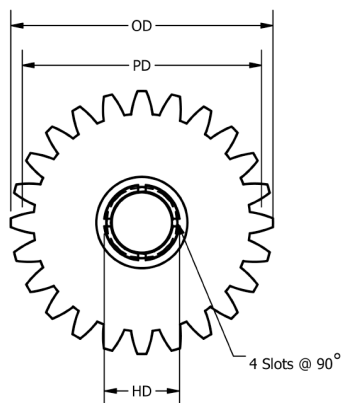

Part Number				
Aluminum	Stainless Steel			
0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL SH4-2624.188H Clamp	0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL SH4-2624.188H Clamp	No. of Teeth	Pitch Dia. PD	Outside Dia. OD
SG96C7A-28	SG96C7S-28	28	0.2917	0.313
SG96C7A-30	SG96C7S-30	30	0.3125	0.333
SG96C7A-32	SG96C7S-32	32	0.3333	0.354
SG96C7A-34	SG96C7S-34	34	0.3542	0.375
SG96C7A-35	SG96C7S-35	35	0.3646	0.385
SG96C7A-36	SG96C7S-36	36	0.3750	0.396
SG96C7A-38	SG96C7S-38	38	0.3958	0.417
SG96C7A-39	SG96C7S-39	39	0.4063	0.427
SG96C7A-40	SG96C7S-40	40	0.4167	0.438
SG96C7A-42	SG96C7S-42	42	0.4375	0.458
SG96C7A-44	SG96C7S-44	44	0.4583	0.479
SG96C7A-45	SG96C7S-45	45	0.4688	0.490
SG96C7A-47	SG96C7S-47	47	0.4896	0.510
SG96C7A-48	SG96C7S-48	48	0.5000	0.521
SG96C7A-50	SG96C7S-50	50	0.5208	0.542
SG96C7A-52	SG96C7S-52	52	0.5417	0.563
SG96C7A-54	SG96C7S-54	54	0.5625	0.583
SG96C7A-55	SG96C7S-55	55	0.5729	0.594
SG96C7A-56	SG96C7S-56	56	0.5833	0.604
SG96C7A-58	SG96C7S-58	58	0.6042	0.625

Continued on next page

Materials:

Aluminum - Anodized, 303 Stainless Steel

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.



SGC-A/S
96 Pitch

GEARS

SGC-A/S
96 Pitch

96 Pitch Precision Spur Gears - Split Hub

Aluminum, Stainless Steel, AGMA Quality 10, 20° Pressure Angle

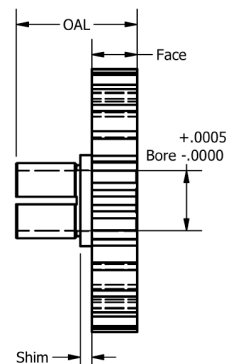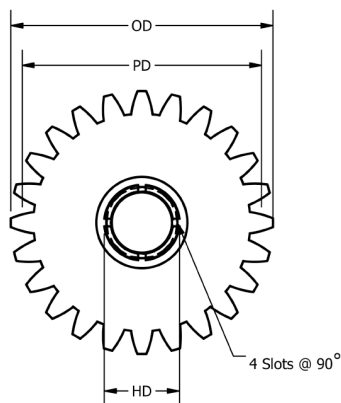

Part Number				
Aluminum	Stainless Steel			
0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL SH4-2624.188H Clamp	0.1248 Bore 0.125 Face 0.187 HD 0.406 OAL SH4-2624.188H Clamp	No. of Teeth	Pitch Dia. PD	Outside Dia. OD
SG96C7A-60	SG96C7S-60	60	0.6250	0.646
SG96C7A-62	SG96C7S-62	62	0.6458	0.667
SG96C7A-64	SG96C7S-64	64	0.6667	0.688
SG96C7A-65	SG96C7S-65	65	0.6771	0.698
SG96C7A-66	SG96C7S-66	66	0.6875	0.708
SG96C7A-70	SG96C7S-70	70	0.7292	0.750
SG96C7A-72	SG96C7S-72	72	0.7500	0.771
SG96C7A-75	SG96C7S-75	75	0.7813	0.802
SG96C7A-78	SG96C7S-78	78	0.8125	0.833
SG96C7A-80	SG96C7S-80	80	0.8333	0.854
SG96C7A-84	SG96C7S-84	84	0.8750	0.896
SG96C7A-85	SG96C7S-85	85	0.8854	0.906
SG96C7A-90	SG96C7S-90	90	0.9375	0.958
SG96C7A-95	SG96C7S-95	95	0.9896	1.010
SG96C7A-96	SG96C7S-96	96	1.0000	1.021
SG96C7A-100	SG96C7S-100	100	1.0417	1.063
SG96C7A-105	SG96C7S-105	105	1.0938	1.115
SG96C7A-110	SG96C7S-110	110	1.1458	1.167
SG96C7A-120	SG96C7S-120	120	1.2500	1.271
SG96C7A-126	SG96C7S-126	126	1.3125	1.333
SG96C7A-132	SG96C7S-132	132	1.3750	1.396
SG96C7A-144	SG96C7S-144	144	1.5000	1.521
SG96C7A-156	SG96C7S-156	156	1.6250	1.646

Materials:

Aluminum - Anodized, 303 Stainless Steel

On Request:

14-1/2° Pressure Angle - additional number of teeth.

Customized or custom versions can be produced with accurate deliveries.
Please call us with your needs.

ondrives.us

1-888-260-7466
516-771-6444

sales@ondrivesus.com
www.ondrivesus.com